



# KBL




PRODUCT LINE

**K9S**

## TANNING DEVICE

# OPERATING INSTRUCTIONS





# Copyright and Trademark

© Copyright 2023 KBL GmbH

This documentation only covers products manufactured by KBL GmbH. It must not be duplicated, photocopied, translated or stored without prior special consent by KBL GmbH. Duplication on electronic media or in a machine readable form, either in whole or in part, is also prohibited.

 **KBL** is a registered trademark of KBL GmbH.

## LICENSE INFORMATION AND SOURCE CODE

This product contains software components that are licensed by the holder of the rights as free software, or open source software, under GNU General Public License, Version 2. You may obtain the source code for these software components from the manufacturer on a data carrier (DVD) by submitting a request to our customer service Department within three years after distribution of the product by the manufacturer. For providing the data carrier and for shipping, we will charge you with 20 USD.

## DISCLAIMER

All information given in this document correspond to the status quo at the date of publication but may be subject to changes. Therefore, we do not accept any liability for, nor do we guarantee the accuracy and/or completeness of the information.

## EXPORT

Technical equipment and versions of the devices are in accordance with the legal prescriptions of the respective country of destination. Export to the European Union of the KBL products, listed in this guide, or operation of the systems in these countries, are not permitted. KBL does not accept any manufacturers liability in case this direction is not adhered to. It is expressly pointed out that any violation of the export/operation prohibition will involve substantial risks of liability for the exporter and/or operator.

### ORIGINAL OPERATING INSTRUCTIONS

Version: BA-K9-TSU-en-us

Date: June 2023

Item no: 0100036804 A

### MANUFACTURER

KBL GmbH

Ringstraße 24-26 · 56307 Dernbach · Germany

### DISTRIBUTED BY (CONTACT)

Laundries unlimited of Indiana, Inc.

dba Tanning Supplies unlimited.

1504 Sadlier Circle South Drive;

Indianapolis; IN 46239, U.S.A.




1-877-307-8434 (toll free) or 317-217-1700

# Contents

<b>1. Labels attached to the tanning device .....</b>	<b>5</b>
<b>2. General information .....</b>	<b>6</b>
2.1 About these instructions .....	6
2.2 Safety signs .....	6
2.3 Signal words .....	6
2.4 Definitions .....	7
2.5 Transport .....	7
2.6 Environmental regulations (disposal of lamps) ..	7
2.7 Service .....	8
2.8 Updating system software .....	8
2.9 Setup location .....	8
2.10 Commissioning .....	9
2.11 Obligations of the studio operator .....	9
2.12 Training of staff .....	10
2.13 Technical modifications .....	10
2.14 Instruction updates .....	10
2.15 Interruption of the boot process .....	10
<b>3. Safety notes .....</b>	<b>11</b>
3.1 General safety notes .....	11
3.2 Duties of the operator .....	11
3.3 Intended use .....	12
3.4 Indications for use .....	12
3.5 Contraindications .....	12
3.6 Warnings .....	12
3.7 Foreseeable misuse .....	12
3.8 Timer controlled operation .....	13
3.9 Guidelines for the use of protective eyewear ..	13
3.10 Freeing a trapped person .....	13
3.11 Lamp breakage .....	14
3.12 Stop - button .....	14
<b>4. Description of the tanning device .....</b>	<b>15</b>
4.1 Standards .....	15
4.2 Components .....	18
<b>5. Connections .....</b>	<b>19</b>
5.1 Class I ME equipment .....	19
5.2 Connecting the mains voltage .....	19
5.3 Connecting an external audio source .....	20
5.4 Level adjustment studio music signal .....	20
5.5 Operation using different audio sources .....	21
5.6 Bluetooth® connection .....	21
5.7 Wireless charging .....	22
5.8 Connecting the channel selection .....	23
5.9 Connecting the external timer .....	24
5.10 Aqua Cool and Aroma connections .....	25
<b>6. Start-up .....</b>	<b>26</b>
6.1 Operating modes .....	26
<b>7. Tanning instructions .....</b>	<b>27</b>
7.1 Instructions for the user .....	27
7.2 Exposure schedule .....	29
<b>8. Tanning mode .....</b>	<b>30</b>
8.1 Pre selection .....	30
8.2 Starting the tanning session .....	34
8.3 Stopping the tanning session .....	34
8.4 Operation during the tanning session .....	34
8.5 Control elements & functions .....	35
<b>9. Standby mode .....</b>	<b>39</b>
9.1 Service mode .....	39
9.2 beautyBooster in standby mode .....	39
9.3 Set decorative lighting .....	39
9.4 Standby functions .....	39
9.5 Video function .....	42
<b>10. Maintenance and cleaning .....</b>	<b>43</b>
10.1 Instructions on cleaning, disinfection and care .....	44
10.2 Maintenance intervals .....	47
10.3 Tools and aids .....	48
10.4 Unlocking the bed .....	48
10.5 Acrylic panes .....	49
10.6 Tubes .....	50
10.7 LED light sources .....	50
10.9 Ventilation and air-conditioning .....	52
10.10 Aroma and Aqua Cool .....	53
10.11 Replacing the Aqua Cool nozzles .....	53
<b>11. System messages .....</b>	<b>54</b>
<b>12. Technical data .....</b>	<b>56</b>
12.1 Dimensions and distances .....	58
12.2 Tube arrangements .....	59
<b>13. Implied warranty .....</b>	<b>60</b>
<b>14. WARRANTY CARD .....</b>	<b>61</b>

# 1. Labels attached to the tanning device

## EXAMPLES

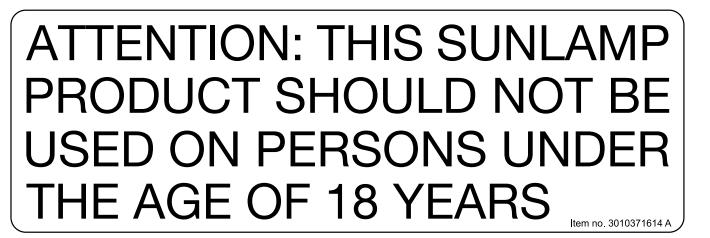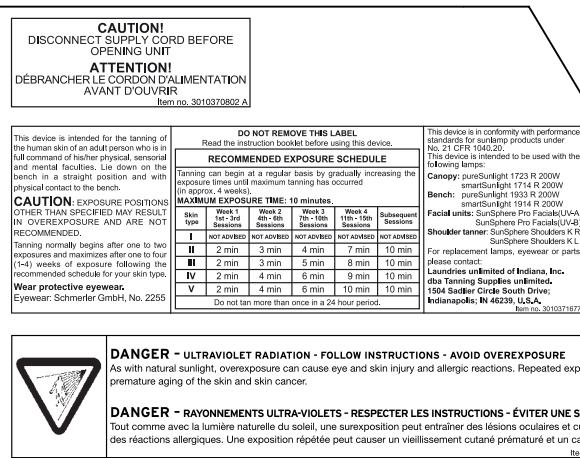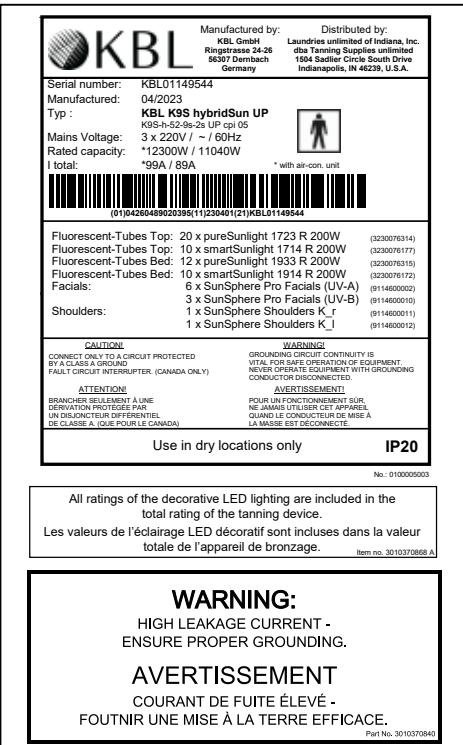

# 2. General information

## 2.1 About these instructions

This operating manual is intended for use by

- studio operator,
- user,
- staff,
- qualified, trained and authorized service technician.

Any person dealing with this KBL Sunlamp Product (hereafter referred to as tanning device) must have read and understood these instructions.

This manual describes tanning devices equipped with the maximum number of features.

Keep this manual ready to hand at all times.

## 2.2 Safety signs

	This symbol indicates that general hazards exist for the human health.
---	--

	This symbol indicates that due to electrical tensions hazards exist to the human health.
---	--

	This symbol indicates that due to UV radiation hazards exist to the human health.
---	---

	This symbol indicates that due to falling loads hazards exist to the human health.
---	--

	This symbol indicates the danger of pinching. When closing and opening panels and covers, you can pinch your hands.
---	--

	This symbol indicates the danger of burns from hot lamps and housing parts. If the tanning device was operated before being switched off and opened, lamps and housing parts may be hot.
---	--

	This symbol indicates that damages may occur at the tanning device, at the material or at the environment.
---	--

	This symbol indicates the type BF applied part.
--	---

### IMPORTANT INFORMATION

	This symbol does not identify safety notices, but states information for a better understanding.
---	--

## 2.3 Signal words

	<b>DANGER</b>
---	---------------

- Death or serious injury is imminent.

	<b>WARNING</b>
---	----------------

- Death or serious injury is possible.

	<b>CAUTION</b>
---	----------------

- Moderate or minor injury is possible.

## 2.4 Definitions

### STUDIO OPERATOR

People who provide tanning devices to users on a commercial basis. The studio operator is trained to operate and maintain the tanning device. He is responsible for the proper operation of the tanning device as well as for compliance with the maintenance intervals.

### USER

A person who uses the tanning device.

### STAFF

People who are responsible for the operation, cleaning and disinfection as well as for the general maintenance work and instruction of the user on how to operate the tanning devices.

### QUALIFIED, TRAINED AND AUTHORIZED SERVICE TECHNICIAN

Qualified staff who have been trained and authorized by the manufacturer for assembly and maintenance work with specific device.

## 2.5 Transport

 <b>WARNING</b>	
	<p><b>Overturning load</b></p> <p>Danger of being crushed by heavy parts of the equipment.</p> <ul style="list-style-type: none"> <li>• Keep the safety distance to the transport machine.</li> <li>• Do not walk under the load.</li> <li>• Wear safety shoes.</li> </ul>

### TRANSPORT BY FORKLIFT TRUCK

	<p>During transport the tanning device may be damaged when using forklift forks that are too short.</p> <ul style="list-style-type: none"> <li>• Use only sufficiently long forks.</li> </ul>
---	---

The tanning device is mounted on a pallet.

- Insert the forks carefully into the openings of the pallet.
- Lift the load by a few centimeters.
- Transport the load carefully to the place of installation.

### OTHER MODES OF TRANSPORT

If a forklift truck cannot be used for transport, the tanning device must be partially disassembled and the parts must be transported individually to the place of installation, e.g. using a dolly. Depending on the weight of the components, lifting them might require several people.

## 2.6 Environmental regulations (disposal of lamps)

Fluorescent lamps contain fluorescent materials and other waste products containing mercury. Some areas of the USA and Canada have specific regulations regarding disposal of these waste. Please check the laws in your area and act in accordance with municipal waste regulations. Please retain proof of proper disposal of lamps. Your local regulatory agency can assist you with the disposal of lamps. Report the number of lamps to your local agency by telephone or in writing. The regulatory agency can provide you with a delivery point for your lamps or will take care, in conjunction with a disposal company, of the collection and proper disposal of the lamps (Fees for this may apply). Please contact your code enforcement officials for more information regarding laws governing disposal of these components in your area.

## 2.7 Service

### REPAIRS - SERVICE - REPLACEMENT - PARTS AND LAMPS - EYE PROTECTION

If you are in need of any of the above mentioned products or services, you should contact:

Laundries unlimited of Indiana, Inc.  
dba Tanning Supplies unlimited.  
1504 Sadlier Circle South Drive;  
Indianapolis; IN 46239, U.S.A.  
1-877-307-8434 (toll free) or 317-217-1700

NOTE: All repairs and replacement components including, but not limited to protective eyewear, lamps, timers and acrylic must be in compliance with CFR 21 1040.20.

### ACCESSORY PARTS

Description	KBL item no.
Protective eyewear	3010104000
Headrest	3010212010

Technical documentation like operating and assembly instructions as well as diagrams and original spare parts can be provided responsibility by KBL.

## 2.8 Updating system software

	<b>Risk of damage by switching off the power supply voltage.</b> Disconnecting power supply during the update process, will lead to damage of electronic components. <ul style="list-style-type: none"> <li>• Make sure that the tanning device is not disconnected from the power supply voltage during the update.</li> </ul>
---	--

To accomplish the update download the "USB-Connect" software offered by KBL. For detailed information press the help-button in the main menu.

## 2.9 Setup location

### OPERATION IN MOBILE FACILITIES

	<b>CAUTION</b> <b>Crushing hazard caused by sudden movements</b> The tanning device is unsuitable for operation in mobile facilities (buses, trains, ships). <ul style="list-style-type: none"> <li>• The tanning device must be adapted in order to ensure trouble-free operation when used in mobile facilities.</li> </ul>
---	---

### DANGER OF OVERHEATING BY OBSTRUCTION OF THE AIRFLOW

Avoid in any case a change, obstruction or blockage of the air inflow and outflow area to the tanning device or to make any unauthorized changes to the tanning device. The manufacturer shall bear no liability for damage or injuries resulting from such actions.

- Comply with the ventilation information to avoid serious system malfunctions.
- Only use OEM spare parts of the same type! The use of other parts will void the manufacturer's warranty!
- Maintain the minimum distances from ceiling, bottom and the walls! Dimensions are given in chapter *technical data*.

	Insufficient air supply leads to overheating which may result in damaging the tanning device!
---	---

### EXPLOSIVE ATMOSPHERE

	<b>DANGER</b> <b>Explosive atmosphere</b> Operation in explosive atmospheres can cause explosions. <ul style="list-style-type: none"> <li>• Do not operate the tanning device in an explosive atmosphere.</li> </ul>
---	--

## SALTY AIR - CONTAMINATED AIR

	<p>Salty air, contaminated air may lead to corrosion of the housing and electrical components. <b>Damage to the tanning device possible!</b></p> <ul style="list-style-type: none"> <li>• Do not operate the tanning device in locations with aggressive environmental conditions (e.g. air containing chlorine).</li> <li>• Do not install the tanning device at swimming pools.</li> </ul>
---	--

## ELECTROMAGNETIC ENVIRONMENT

Do not use near (24 inches or closer) equipment sensitive to electromagnetic interference.

This tanning device complies with International Standards (as set forth in manufacturer's declaration following) for electromagnetic compatibility for medical electrical equipment and/or systems.

These standards are designed to provide reasonable protection against harmful interference in a typical medical installation.

However, because of the proliferation of radio-frequency transmitting equipment and other sources of electrical noise in healthcare and other environments, it is possible that high levels of such interference due to close proximity or strength of a source might disrupt the performance of this tanning device. Medical electrical equipment needs special precautions regarding EMC, and all equipment must be installed and put into service according to the EMC information specified in this manual (*chapter 4.1*).

## DIFFERENCE IN TEMPERATURE

	<p><b>Risk of damage by switching on the power supply voltage.</b></p> <p>When there are great differences in temperature between the transportation route and the installation site the tanning device shall not be put into operation immediately after being set up.</p> <ul style="list-style-type: none"> <li>• Before connecting the tanning device to the power supply, wait at least for 2 hours.</li> </ul>
---	--

## 2.10 Commissioning

	<p><b>DANGER</b></p> <p><b>Damaged mains power cable</b></p> <p>Risk of death or fatal injury due to electric shock when touching a damaged mains power cable.</p> <ul style="list-style-type: none"> <li>• Only the manufacturer or specialized companies may replace the mains power cable!</li> </ul>
---	--

Initial commissioning will be carried out by the manufacturer's own service technicians or by qualified, trained and authorized service technicians. The tanning device will be handed over ready for use.

As studio operator it is your responsibility to observe the electrical regulations applicable at the installation site.

The tanning device incorporates special preventive measures with regard to the electromagnetic compatibility and must be installed and commissioned according to the EMC instructions obtained from this operating instructions.

If the tanning device has not been used for a longer period of time, then it must first be inspected by qualified, trained and authorized service technicians, before being put back into operation again.

Ensure no electromagnetic compatibility issues with the siting (*chapter 4.1*).

## 2.11 Obligations of the studio operator

- The studio operator is responsible for informing users on possible risks of tanning.
- All danger and safety labels attached to the tanning device must be observed and shall not be removed!
- The tanning device shall only be used when in proper operational condition!
- The studio operator is responsible to ensure that the tanning device is handled properly.

- No safety equipment (e.g. thermal switch) shall be removed, deactivated, or otherwise bypassed as it may impair the safe operation of the tanning device!
- The electrical installation must be equipped with a freely accessible all-pole disconnecting device (Master switch with clearly marked on/off settings e.g. "O" and "I" or additional indicator light). The master switch shall be fitted externally on the side of the tanning booth, so the operator can access it at any time, even when the tanning device is in operation.
- Site the tanning device in such a way as the MAINS ON/OFF switch and the MAINS supply cable are not obstructed (difficult to access).

## 2.12 Training of staff

The studio operator is obligated to train his staff and to instruct them in the established legal and accident prevention regulations. He must ensure that his staff has understood and observes these instructions. This includes:

- Operating instructions.
- Safety instructions.
- Information regarding intended use and foreseeable misuse.
- Cleaning/disinfection and maintenance instructions.
- The instructions and additional information from the manufacturer must be available to the staff at their workplace. Regularly test your staff's safety consciousness and awareness of the risks, taking into account the operating instructions of the tanning device.
- Make sure that the cleaning/disinfection intervals are complied with, especially the cleaning and disinfection of the tanning device after every use.
- Make sure that your staff provides the customers with appropriate advice, especially regarding tanning times, possible risks and the operation of the tanning device.

## 2.13 Technical modifications

The tanning device has been constructed in accordance with current safety regulations.

The specifications and illustrations on these instructions are subject to technical modifications which are required in order to improve the tanning device.

- Unauthorized modifications and changes to the tanning device are forbidden.
- Use only OEM spare parts!

## 2.14 Instruction updates

	<p><b>Use the current tanning device documentation</b></p> <p>The tanning device documentation is updated regularly by the manufacturer. Make sure you are using the latest version. For instruction updates, please contact:</p> <p>Laundries unlimited of Indiana, Inc. dba Tanning Supplies unlimited. 1504 Sadlier Circle South Drive; Indianapolis; IN 46239, U.S.A. 1-877-307-8434 (toll free) or 317-217-1700</p>
--	--

## 2.15 Interruption of the boot process

	<p>If the boot process is interrupted several times, the software version is automatically reset to the previous version.</p> <ul style="list-style-type: none"> <li>• Returning to the latest version is only possible through a manual update.</li> </ul>
---	---

# 3. Safety notes

## 3.1 General safety notes

Read the operating instructions before using the tanning device.

This tanning device must be operated with an external timer as specified in chapter *Timer controlled operation*.

**NOTE:** This tanning device is intended to be used by only one adult person at a time. Therefore, only one (1) pair of protective eyewear is provided with each KBL tanning device. Use protective eyewear whenever the tanning device is operated. Read related operating instructions in chapter *Guidelines for the use of protective eyewear*.

Do not tan more than once in a 24 hour period. Tanning results normally occur after a few sessions and increase after four (4) weeks of regular exposure. Follow the exposure schedule in accordance with your skin type as specified in chapter *Exposure schedule*. Failure to do so may result in overexposure. However, regardless of how dark an individual may tan on this tanning device, it will not provide adequate protection against overexposure to natural sunlight or UVB tanning devices.

**SKIN TYPE II** - This is the individual that usually burns easily and severely, tans minimally or lightly and peels.

**SKIN TYPE III** - Often referred to as „AVERAGE“ complexion. Burns moderately and tans about average.

**SKIN TYPE IV** - This individual burns minimally, tans easily and above average with each exposure.

**SKIN TYPE V** - This individual rarely burns, tans easily and substantially.

## FURTHER INSTRUCTIONS



### WARNING

No modification of this equipment is allowed.

- Follow all instructions given in this manual. In addition to that, observe all applicable statutory provisions and regulations, also those applicable in the country of operation.
- The tanning device may only be installed and assembled by qualified, trained and authorized service technicians.
- Observe all danger signals and safety signs attached to the equipment.
- Safety signs must not be removed, and safety appliances must not be disabled.
- The tanning device may only be operated when in perfect working condition.
- Never operate the tanning device with the outer covering removed or with the acrylic panes removed.
- Pay attention to the load limit of the bed pane (tanning bed devices only).
- The bed must only be opened with bed pane folded down.
- The canopy is not designed to carry additional loads. In particular, during installation the canopy must not be charged with additional loads.

## 3.2 Duties of the operator

The manufacturer cannot be held liable for damages or injuries resulting from improper use of the equipment or non-observance of these operating instructions. Only use original spare parts, otherwise operating authorization and terms of guarantee will become invalid.

### 3.3 Intended use

This sunlamp product is a tanning device intended for the tanning of the human skin of an adult person who is in full command of his/her physical, sensorial and mental faculties. Moreover, sufficient knowledge and experience are required.

Wear protective eyewear to block UV radiation during tanning.

Lie down on the bed in a straight position and with physical contact to the bed. Choose a suitable position to reach the interior control panel at all times during the tanning.

### 3.4 Indications for use

This sunlamp product is an over-the-counter tanning device emitting ultraviolet light in the UVB and UVA region of the spectrum intended for tanning of the human skin of an adult person.

### 3.5 Contraindications

Any adult person listed here after may not use this sunlamp product. If in doubt consult a physician.

This sunlamp product is contraindicated for use on persons under the age of 18 years.

This sunlamp product must not be used

- if skin lesions or open wounds are present.
- by persons wearing heart pacemakers.
- by persons prone to sunburn (skin type I).
- by persons already suffering from sunburn.
- by persons taking medicines.
- by persons taking photosensitive medications.
- by persons, who had several severe sunburns as children.
- by persons, who are being treated by a physician for conditions associated with photosensitivity.
- by persons, who are prone to freckles.

- by persons with atypical discolored skin areas or/ and with more than five atypical moles with a diameter of 5 millimeters or more and persons with more than 16 moles with a diameter greater than or equal to 2 millimeters. If in doubt, consult a physician!
- by persons with naturally red hair color.
- by persons, who do not tan at all or cannot tan without getting sunburn.

### 3.6 Warnings

- This sunlamp product should not be used on individuals who have had skin cancer or have a family history of skin cancer.
- Persons repeatedly exposed to ultraviolet sunlamp products should be regularly evaluated for skin cancer.

### 3.7 Foreseeable misuse

- This sunlamp product is not designed to be used by persons with reduced physical, sensory or mental abilities and/or with a lack of experience or insufficient knowledge.
- During the operation no other person shall be in the radiation range of the sunlamp product.
- Children, should be supervised to make sure that they do not use the sunlamp product as a toy.
- The irradiation of animals, especially reptiles.
- Any type of use that differs from the provisions under the chapter *Safety notes* is considered misuse.

### 3.8 Timer controlled operation

This sunlamp product must be operated with an external timer that is listed in compliance with UL 917. If the external timer fails, the sunlamp product is automatically switched off by an internal timer after the TE-time of the respective type of sunlamp product. The maximum tanning time must not be exceeded.

- The exposure times stated in the exposure schedule must be entered at the external timer.
- Information on how to enter the exposure time can be found in the operating instructions of your external timer.

Accessory equipment connected to the analog and digital interfaces must be certified to the respective IEC standards (i.e. IEC 60601-1 for medical equipment). Furthermore all configurations shall comply with the system standard IEC 60601-1-1.

### 3.9 Guidelines for the use of protective eyewear

Before use, the length of the elastic strap must be adjusted to the required head size. For maximum protection to elevate stray light, the eye protection must fit securely and comfortably on the eyelids. If is any stray light from the sides or under the rim of the lens, DO NOT USE this eye protection. Ask the studio staff to recommend an alternative eye protection.

Never use eye protection lenses that are broken, cracked, bleached out, or otherwise damaged.

For cleaning the protective eyewear refer to chapter *Instructions on cleaning, disinfection and care*.

### 3.10 Freeing a trapped person

#### PROPER FUNCTION OF CANOPY DRIVE

Regardless of the operating state (stand by or in operation) of the tanning device, the canopy can be opened (lifted) manually from the inside or the outside easily and with very little effort, any time.

The easiest way to open the canopy is using the designated handle which is freely accessible from the inside and the outside of the device.

The canopy drive (lift) mechanism is a purely mechanical function that does not depend on electrical power.

#### MALFUNCTION OF CANOPY DRIVE

If, during a tanning session, a mechanical defect occurs at the canopy drive, lifting the canopy manually from the inside and from the outside is still possible at any time.

There is no mechanical interlock to prevent lifting the canopy.

However, if the canopy drive fails, a higher effort is required to manually lift the canopy and therefore one or two persons are needed to support the opening process from the outside.

#### PREVENTIVE MEASURES


- Observe the maintenance instructions for the canopy drive as prescribed in chapter *Maintenance intervals*.
- Look for a quiet and smooth movement of the canopy drive. If unusual noises occur, the canopy drive must be checked by qualified, trained and authorized service technicians.

### 3.11 Lamp breakage

	<p><b>CAUTION</b></p> <p><b>Risk of mercury toxicity</b></p> <p>Risk of mercury toxicity after a lamp breakage. Please comply with the following instructions:</p> <ul style="list-style-type: none"><li>• you must immediately disconnect the tanning device from the mains power.</li><li>• have children immediately leave the room.</li><li>• you must ventilate the room for at least 15 minutes.</li><li>• put on disposable gloves.</li><li>• open the window first, then collect the glass shards and escaped mercury and put it into a sealable container.</li><li>• bring the container to a collection site for waste lamps.</li></ul>
---	---

### 3.12 Stop - button

At the head end of the tanning device there is a stop button, with which the running tanning session can be interrupted.

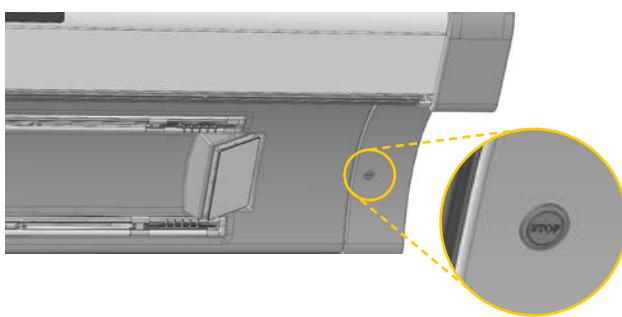

To restart tanning -> press the START key on the control panel.

# 4. Description of the tanning device

## 4.1 Standards

This tanning device is in conformity with performance standards 21 CFR 1040.20 and the standards for electro-magnetic compatibility IEC 60601-1-2:2014 and EN 60601-1-2:2015 (EMC):

EN61000-3-2; EN61000-3-3; EN60601-1-2; EN55011; EN61000-4-2; EN61000-4-3; EN61000-4-4; EN61000-4-5; EN61000-4-6; EN61000-4-8; EN61000-4-11.

According to CISPR 11 the electromagnetic emission characteristic of this tanning device is classified in Group 1 and Class A.

The emission characteristics of this device make it suitable for use in industrial areas and hospitals (CISPR 11 class A). If it is used in a residential environment (for which CISPR 11 class B is normally required) this device might not offer adequate protection to radio-frequency communication services. The studio operator might need to take mitigation measures, such as relocating or re-orienting the equipment.

See EMC Tables according to IEC 60601-1-2:2014 and EN 60601-1-2:2015.

If, at any point, you determine that the ESSENTIAL PERFORMANCE of the tanning device has been impaired (due to electro-magnetic interference or other causes), then terminate installation / operation and consult the factory before continuing.

Table 1

<b>Guidance and Manufacturer's Declaration - Electromagnetic Emission</b>		
<b>Emission tests</b>	<b>Compliance</b>	<b>Electromagnetic environment - Guidance</b>
RF emissions according to CISPR 11	Group 1	The tanning device uses RF energy exclusively for its internal FUNCTION. Therefore, its HF emissions are very low and not likely to cause any interference in nearby electronic equipment.
RF emissions according to CISPR 11	Class A	The tanning device is intended for use in facilities other than residential areas, and for facilities that are directly connected to a public low-voltage supply system that also supplies residential buildings.

Table 2

<b>Guidance and Manufacturer's Declaration – Electromagnetic Immunity to Interference</b>			
The tanning device is intended for use in the electromagnetic environment specified below. The studio operator of the tanning device should assure that it is used in such an environment.			
<b>Immunity tests</b>	<b>IEC 60601-Test level</b>	<b>Compliance level</b>	<b>Electromagnetic environment - Guidance</b>
Electrostatic discharge according to IEC 61000-4-2	$\pm 8 \text{ kV}$ contact discharge $\pm 15 \text{ kV}$ air discharge	$\pm/- 8 \text{ kV}$ contact discharge $\pm/- 15 \text{ kV}$ air discharge	Floors should be made of wood or concrete or be covered with ceramic tiles. If floors are covered with synthetic material, the relative humidity needs to be at least 30 %.
Fast transient electrical disturbances/bursts according to IEC 61000-4-4	$\pm 2 \text{ kV}$ for power-supply lines $\pm 1 \text{ kV}$ for input and output lines	$\pm 2 \text{ kV}$ for power-supply lines $\pm 1 \text{ kV}$ for input and output lines	Mains power quality should be that of a typical industrial or hospital environment.
Surge voltages (surges) according to IEC 61000-4-5	$\pm 1 \text{ kV}$ differential mode voltage $\pm 2 \text{ kV}$ common mode voltage	$\pm 1 \text{ kV}$ differential mode voltage $\pm 2 \text{ kV}$ common mode voltage	Mains power quality should be that of a typical industrial or hospital environment.
Voltage dips, short interruptions and voltage variations on power-supply input lines according to IEC 61000-4-11	Dips 0% for 1 cycle 70% for 25/30 cycles  Interrupts 0% for 250/300 cycles	Dips 0% for 1 cycle 70% for 25/30 cycles  Interrupts 0% for 250/300 cycles	Mains power quality should be that of a typical industrial or hospital environment. If the studio operator of the tanning device requires continuous operation of the device even in the event of interruptions of the power supply, it is recommended that the tanning device is powered by an uninterrupted power supply unit.
Power-frequency (50/60 Hz) magnetic field according to IEC 61000-4-8	30 A/m	30 A/m	Power-frequency magnetic fields should be at levels characteristic of a typical location in a typical industrial or hospital environment.

Table 4

<b>Guidance and Manufacturer's Declaration – Electromagnetic Immunity to Interference</b>			
<b>Immunity tests</b>	<b>IEC 60601-Test level</b>	<b>Compliance level</b>	<b>Electromagnetic environment - Guidance</b>
			<p>Portable and mobile RF communications equipment should be used no closer to the tanning device, including cables, than the recommended separation distance calculated from the equation applicable to the frequency of the transmitter.</p> <p>Site the device a minimum of 24 inches from any other electrical / electronical devices to mitigate electro-magnetic efforts between devices</p>
Conducted RF disturbances according to IEC 61000-4-6	$3 \text{ V}_{\text{eff}}$ 150 kHz to 80 MHz $10 \text{ V}_{\text{eff}}$ 150 kHz to 80 MHz	$3 \text{ V}_{\text{eff}}$ 150 kHz to 80 MHz $10 \text{ V}_{\text{eff}}$ 150 kHz to 80 MHz	
Radiated RF disturbances according to IEC 61000-4-3	$10 \text{ V/m}$ 80 MHz to 1,0 GHz $10 \text{ V/m}$ 1,4 GHz to 2,0 GHz $10 \text{ V/m}$ 2,0 GHz to 2,7 GHz	$10 \text{ V/m}$ 80 MHz to 1,0 GHz $10 \text{ V/m}$ 1,4 GHz to 2,0 GHz $10 \text{ V/m}$ 2,0 GHz to 2,7 GHz	<p>Site the device a minimum of 24 inches from any other electrical / electronical devices to mitigate electro-magnetic efforts between devices</p>
			<p>Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey <sup>a</sup> shall be lower than the compliance level in all frequency ranges.</p> <p>Interference may occur in the vicinity of equipment marked with the following symbol:</p> 

<sup>a</sup> Field strengths from fixed transmitters, such as base stations for radio telephones and land mobile radios, amateur radio, AM and FM radio and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the tanning device is used exceeds the applicable RF compliance level above, The tanning device should be observed to verify normal operation in every location of use. If abnormal performance is observed, additional measures may be necessary, such as reorienting or relocating the tanning device unit.

Table 6

<b>Recommended separation distances between portable and mobile RF communications equipment and the tanning device</b>
The tanning device is intended for use in an electromagnetic environment in which radiated RF disturbances are controlled. Site the device a minimum of 24 inches from any other electrical / electronical devices to mitigate electro-magnetic efforts between devices.

## 4.2 Components

**Canopy:** Tubes, facial tanners, exterior- and interior control panel.

**Side part:** Tubes and facial tanner.


**Bed part:** Tubes, shoulder tanner, fans and the electronic unit.

Depending on the model also with further, optionally available components.

The specific tube equipment of the individual device types can be found in the chapter "*Technical data*".


1	Aqua Cool - nozzles
2	Exterior control panel
3	Interior control panel
4	SunSphere Facial tanner
5	Sunsphere Shoulder tanner
6	Area for wireless charging of smartphones
7	Bed (faceplate)
8	Opening mechanism of the bed part
9	Bed pane 
10	Side pane
11	beautyBooster
12	Canopy pane
13	Air nozzles
14	Canopy

Example: KBL K9S hybridSun

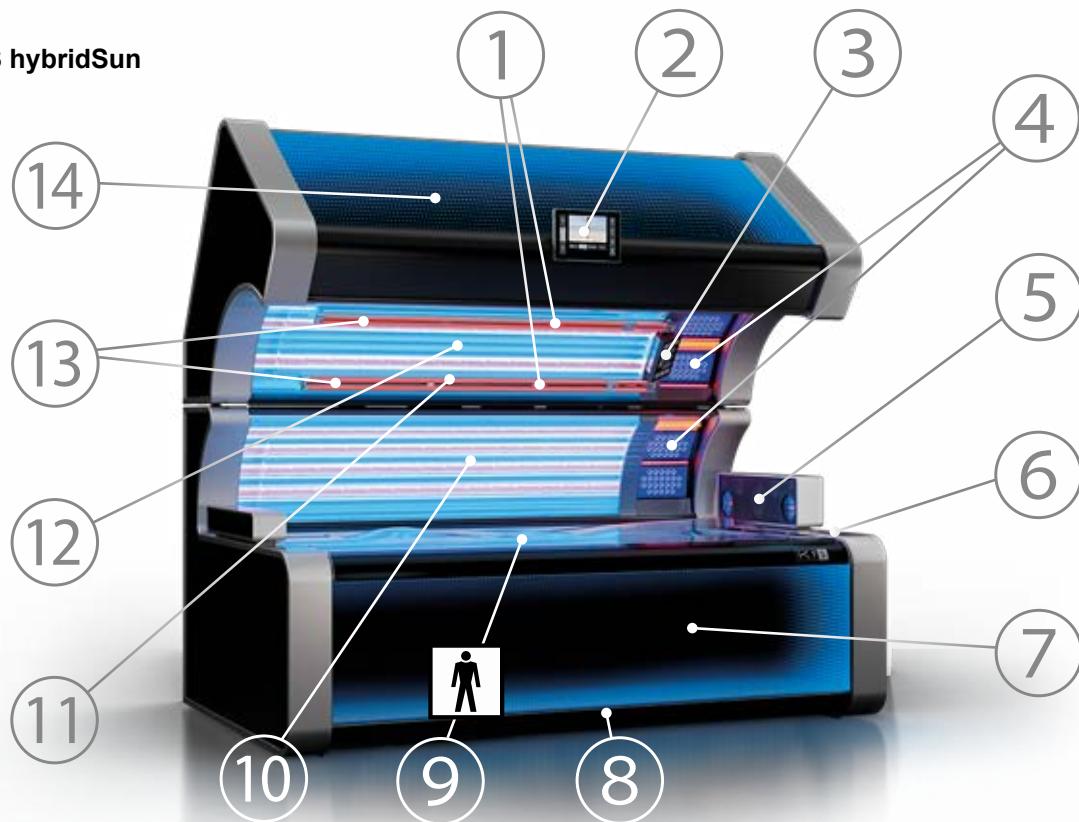

# 5. Connections

## 5.1 Class I ME equipment

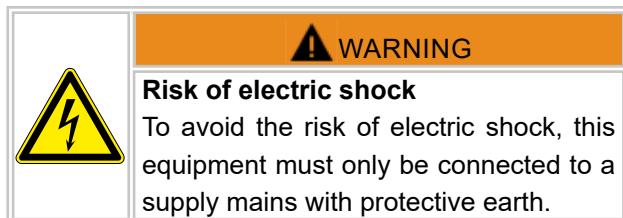

## 5.2 Connecting the mains voltage




Both the power supply and the related connection work must comply with national standards and local regulations. The connection work and replacement of the power supply cord must only be performed by qualified, trained and authorized service technicians. The connection to the 3 x 220 V mains must be protected by maximum over current protection. For Canada a Class-A ground fault circuit interrupter (GFCI) has to be used. Further information can be found in chapter "Technical data".


### CONNECTION REQUIREMENTS

The electrical installation must be equipped with a freely accessible all-pole disconnecting device in accordance with the overvoltage category III. (Master switch with clearly marked on/off settings e.g. "O" and "I" or additional indicator light). The master

switch shall be fitted externally on the side of the tanning booth, so the operator can access it at any time, even when the tanning device is in operation. This means that for full separation each pole must have a contact gap according to the conditions of the overvoltage category III. The device shall be capable of being locked in the off-position and shall comply with IEC 60447. A supply main switch must not be incorporated in the power supply cord. A Class-A ground fault circuit interrupter (GFCI) has to be used for Canada. Should the operation of the tanning device cause any interference in the power supply network, e.g. with ripple-control systems (TRA), consult your power supply company to have corresponding blocking elements (audio frequency suppressors) installed.

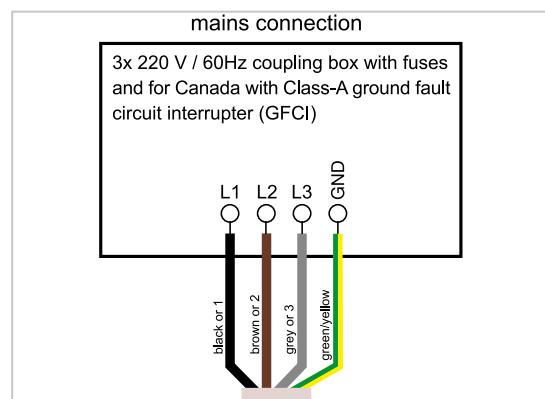



### WIRING FOR 3-PHASE OPERATION

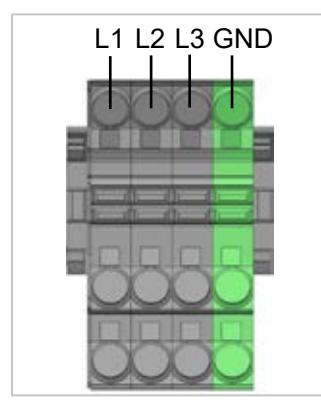


3-Phase Operation  
(3 x 220V / 60Hz)

## 5.3 Connecting an external audio source

When connecting an external audio source (studio music), pay attention to the correct polarity.

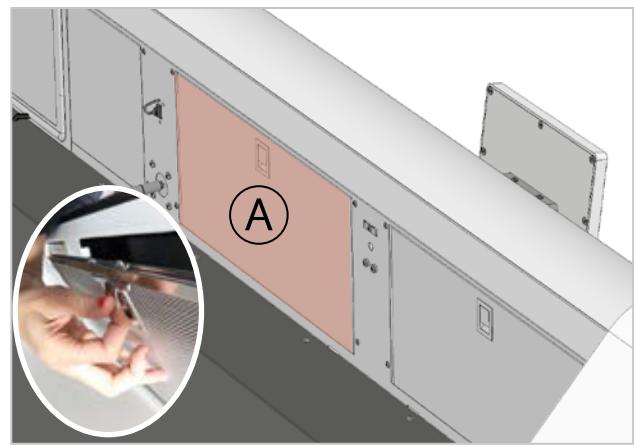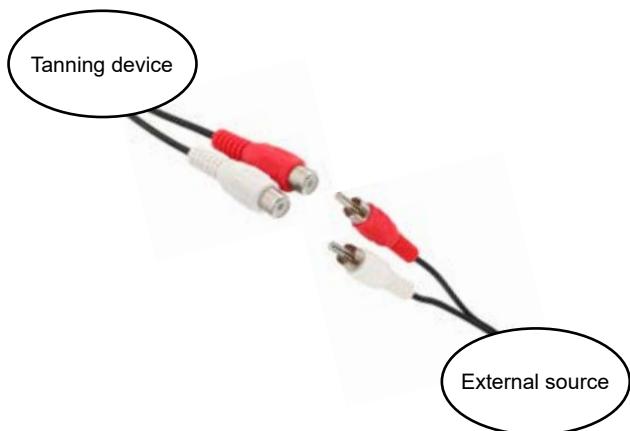

Ⓐ Remove filter cartridge.


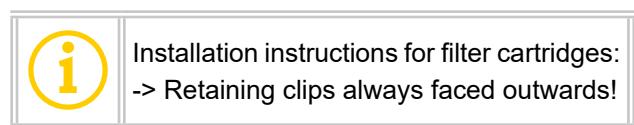


For information on further device connections, refer to your ASSEMBLY INSTRUCTION in the section "Connections & Initial operation".

## 5.4 Level adjustment studio music signal

The components of the voice / audio system are installed in the canopy. For level adjustment, the second filter cartridge from the left must be removed.

### REMOVE FILTER CARTRIDGE

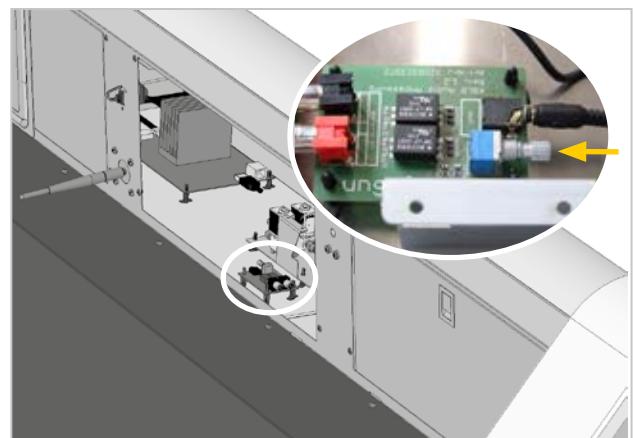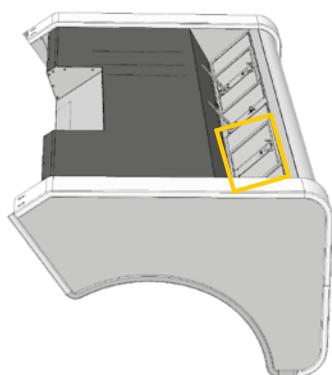

## 5.5 Operation using different audio sources

The audio source can be preselected and changed via the interior and exterior control panel. The tanning device can be operated using the following audio sources:

### INTERNAL MP3 PLAYER

When using the internal MP3 player, you can either play the music tracks that are originally supplied on the SD card.

### EXTERNAL AUDIO SOURCES

As an external audio source, you can connect devices ranging from the standard-line level to low loudspeaker levels.

These sources comprise:

- Studio music
- External bluetooth players such as smartphones etc.

### EXTERNAL 100 V AUDIO SIGNAL ON STUDIO CHANNEL (OPTIONAL FEATURE)

If you decide for a connection to a 100 V audio system, you will need a transformer (KBL no.: 9100 0170 00) for the transmission of the audio signal. This connection must be made by trained and authorised service technicians.

## 5.6 Bluetooth® connection

To connect an external player (smartphone etc.) wirelessly to the tanning device an optional Bluetooth interface is available.


### CONNECT EXTERNAL PLAYER

A Bluetooth connection can be established in standby and during tanning mode.


	<p>Make sure that you are within the reception area (about 2 meters). Make sure that your player is configured to search for other bluetooth devices. Should this not be the case, enable bluetooth manually. To do so, please read the instructions for your player.</p>
---	---

- Depending on your settings the search will be performed automatically or manually. All available Bluetooth devices within reach will be listed after a short time.
- Select the desired tanning device from the available tanning devices. The designations for your tanning devices can be freely assigned in the service menu.
- If necessary, confirm the shown code and connect again. Not every smart phone asks for a code.

Example - Samsung Galaxy

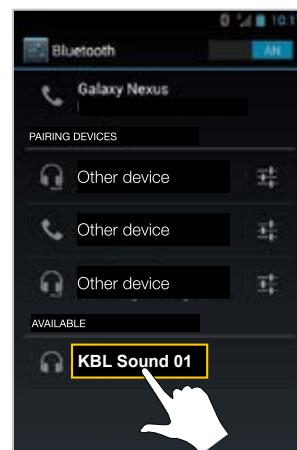

Example - Apple iPhone

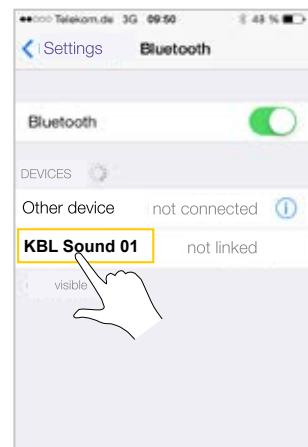

- A two-time beep indicates that your player is connected to the tanning device.

Example - Samsung Galaxy




Example - Apple iPhone



## 5.7 Wireless charging

A charging station for wireless charging is integrated in the right base of the tanning device. Suitable devices can be easily placed and charged here.

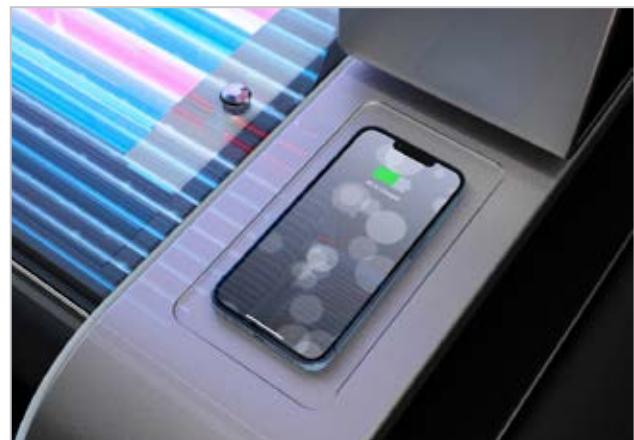

- Set your player to a **medium volume level** and start the music.
- Adjust the volume level on your player.
- During the tanning session, the volume control has to be done at the tanning device.

### DISCONNECT EXTERNAL PLAYER

An existing connection is disconnected automatically after tanning.

The connection is automatically disconnected if the tanning session is not started within 6 minutes.

### COMPATIBILITY OF BLUETOOTH DEVICES

KBL GmbH attaches great importance to hardware compatibility. Due to the large number of manufacturers, KBL can not guarantee a 100 % compatibility. In rare cases, it may happen that a bluetooth connection can not be established.

### CORRECTIVE ACTION

Each bluetooth device offers a list of paired devices. Delete the older entries in this list which have a profile that overlaps with the ones for which you want to pair your player.



Start the bluetooth device detection again.



The Bluetooth function must be activated in the service menu.

## 5.8 Connecting the channel selection

The following diagrams show the wiring of the channel selection on the audio equipment's side, for pulse coding as well as for BCD coding.

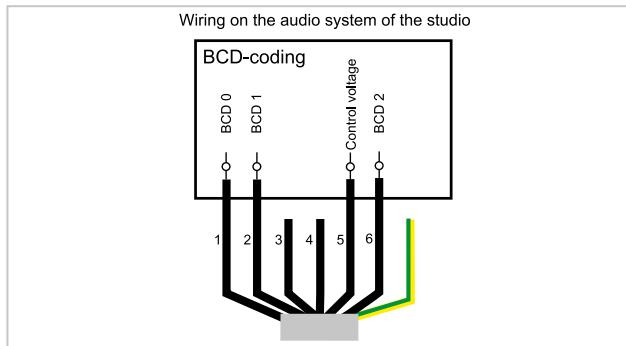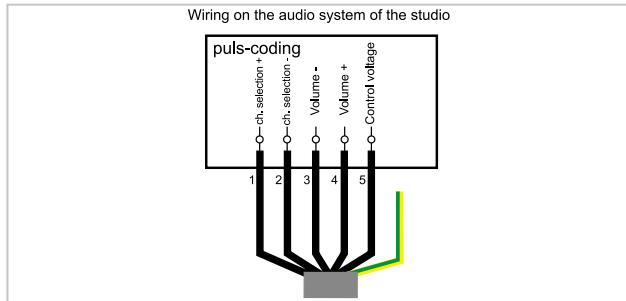


CHANNEL	BCD 0	BCD 1	BCD 2
1	0	0	0
2	1	0	0
3	0	1	0
4	1	1	0
5	0	0	1
6	1	0	1
7	0	1	1
8	1	1	1


## 5.9 Connecting the external timer

Lead the external connector cable of the T-Max timer from the main connection plate through to the T-Max box.


### T-MAX CABLE ENTRY AT THE MAIN CONNECTION PLATE (EXTERNAL CONNECTOR CABLE)

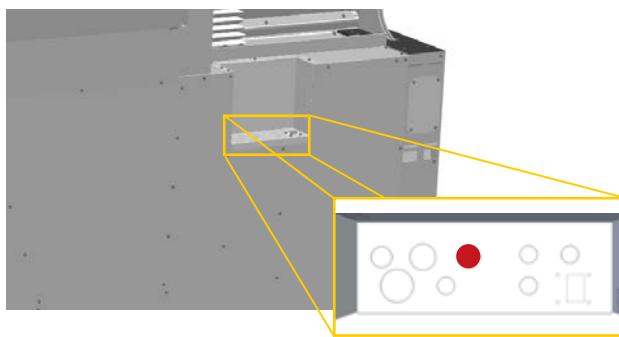


### POSITION T-MAX BOX

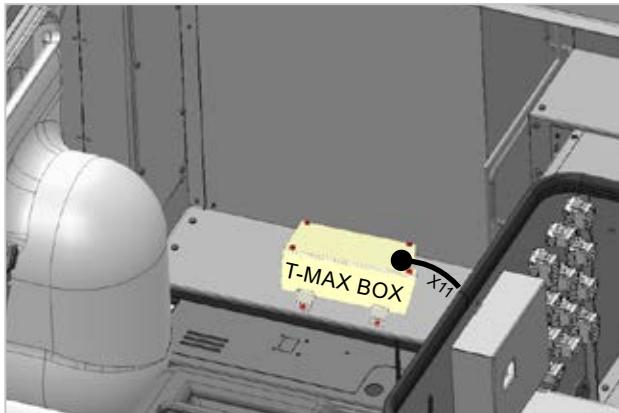


- Remove the cover from the T-Max box.
- Insert the T-Max board to the socket pins of the box.



- Attach the connectors to the T-Max board and housing (ground).

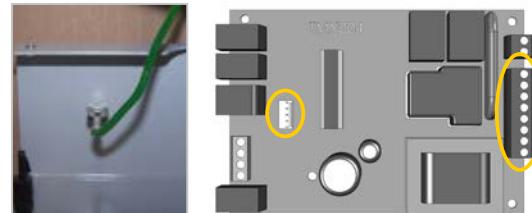

- Attach the cover of the T-Max box.
- Place T-Max timer left sided to the T-Max box on the rear wall baseplate.

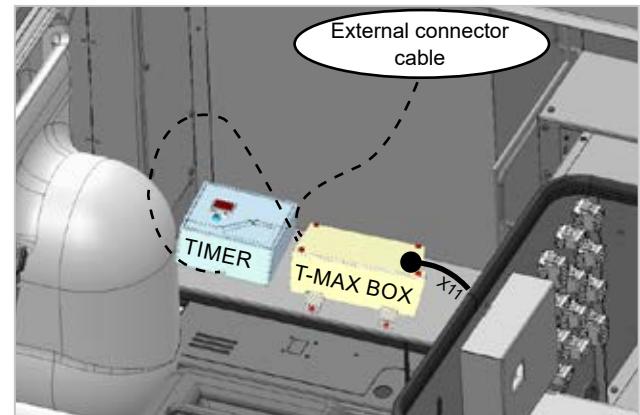

- Connect the external cable and the T-Max timer to the T-Max box.


i

- The exposure times stated in the exposure schedule must be entered at the external timer.
- Information on how to enter the exposure time can be found in the operating instructions of your external timer.

## 5.10 Aqua Cool and Aroma connections


### AQUA COOL

The Aqua Cool box is equipped with a liquid-level sensor **①** as well as with a connection to the Aqua Cool canister **②**. Furthermore, the box houses the compressor ensuring the compressed-air supply **③**, and the Aroma box **④** with its related connections.

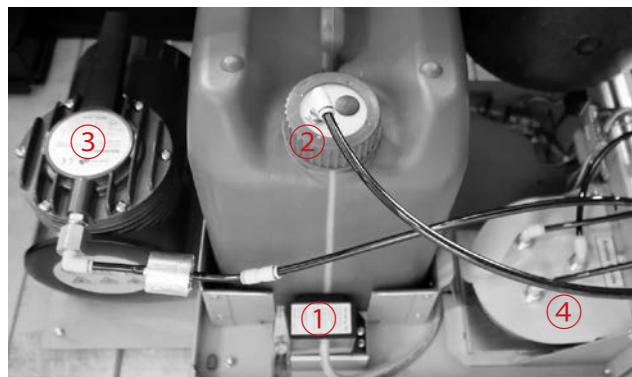

### AROMA


The Aroma box is attached within the Aqua Cool box and equipped with three hose connections, one for the compressed-air supply **⑤** and two leading to the Aroma nozzles **⑥**.

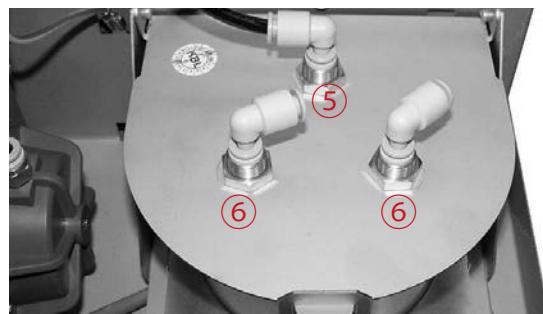

**5** Aroma box (inlet)

**6** Aroma box (outlets)

### FURTHER POSSIBLE CONSTRUCTION TYPE

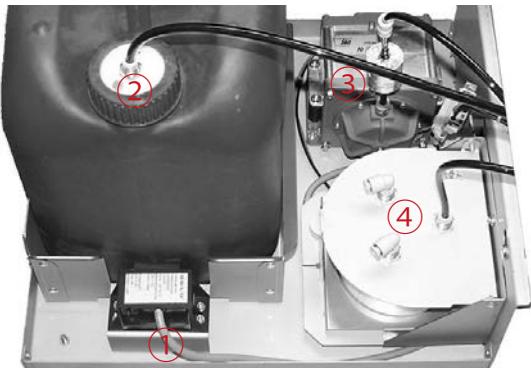

<b>1</b>	Connector (liquid-level monitoring)
<b>2</b>	Connection to Aqua Cool canister
<b>3</b>	Compressor with compressed-air connection
<b>4</b>	Aroma box

# 6. Start-up

Before switching on for the first time:

- Fix the supplied warning sign or one with the following wording permanently to the wall close to the tanning device:

## Warning

UV-radiation can cause eye and skin damage as well as skin aging and possibly skin cancer. Ask the studio staff for further information.

Wear protective goggles.

Certain medicines or cosmetics can increase the sensitivity of the skin to UV radiation. If in doubt, consult a physician.

- Determine the pre settings for the tanning device in the service menu.
- Check correct installation of fluorescent tubes. The tube labeling must be visible, otherwise no tanning effect may be obtained.
- Store these Operating Instructions in a place that allows for easy access at any time.

## 6.1 Operating modes

### STANDBY MODE

The tanning device is in an idle state, i.e. it is connected to the mains but is currently not being used. The tubes and the tanning lamps are switched off. From the standby mode, you can change over to the tanning mode or to the service mode.

### TANNING MODE

The tubes and the tanning lamps are switched on and a tanning session is in progress. While the tanning device is in tanning mode, the settings for the ongoing tanning session can be changed via the interior control panel.

### SERVICE MODE

In the service mode, the tanning device is configured for the tanning mode. Various values can be displayed and test functions can be carried out.

### FAN RUN-ON

After the tanning session, the fan runs on for 3 minutes in order to cool down the device. The fan power is automatically decreased as the tubes cool down.

# 7. Tanning instructions

Tanning normally begins after one to two exposures and maximizes after one to four (1-4) weeks of exposure following the recommended schedule for your skin type.

## 7.1 Instructions for the user

Observe the following tanning instructions.

### GENERAL

- Only individuals described in chapter *Intended use* and not listed in chapter *contraindications* may use the tanning device.
- The different skin types tolerate the sun and hence tanning times to a different degree. Please observe the specifications in the skin-type table (supplied with the tanning device) and the tanning times. After having reached the ultimate tan, further tanning can only be achieved by substantially exceeding the allowed tanning times. This must absolutely be avoided.
- It cannot generally be assumed that the use of a tanning device reduces the risk of getting a sunburn.

### DANGER OF ULTRAVIOLET RADIATION

- The UV radiation of the sun or of UV appliances can cause damage to the skin or to the eyes. These biological effects depend on the type and amount of radiation as well as on the individual sensitivity of the skin.
- After excessive exposure to radiation, the skin may exhibit sunburn. Excessively repeated exposure to UV radiation of sunlight or UV appliances can result in premature ageing of the skin and in a higher risk of skin cancer.

- Do not expose yourself to UV radiation if you take medicine that increase the sensitivity to ultraviolet radiation, e.g. antibiotics, sulfonamides, psychiatric drugs, tranquilizers, antidiabetes treatments and diuretics and/or sun creams which contain psoralen or coumarin may increase skin sensitivity. When in doubt, seek medical advice.
- Seek medical advice if persistent swellings or skin sores develop or pigmented moles change in appearance.
- As with natural sunlight, overexposure may cause eye injury and sunburn;
- A person with a history of skin problems should consult a physician before using the tanning device;
- Overexposure must be avoided;
- Children, elderly, or fair skinned people who always burn easily and either never tan or barely tan shall not use this tanning device.
- Remove cosmetics before tanning and do not use any sunscreen or products that accelerate tanning. For tanning, the skin should have been thoroughly cleaned and dry.

## DANGER OF LONG-TERM CONSEQUENCES

Exposure to ultraviolet radiation may increase the likelihood of developing skin cancer and cause serious eye injury.

You do not need to become tan to make Vitamin D.


- Overexposure is to be avoided.
- The elderly people should not use this tanning device.
- Children shall not use this tanning device.
- While there is no immediate clinical evidence of UVA exposure and its effects upon pregnant woman, it is strongly advised that pregnant woman be discouraged from using the tanning device.



If in doubt seek for medical advice!

## FOR EACH TANNING SESSION

- Remove cosmetics before the session and do not use any sunscreen.
- Allow for at least 24 hours to pass between sessions.
- After a tanning session in a studio, do not take another sunbath out of doors on the same day.
- Always wear the supplied protective goggles.

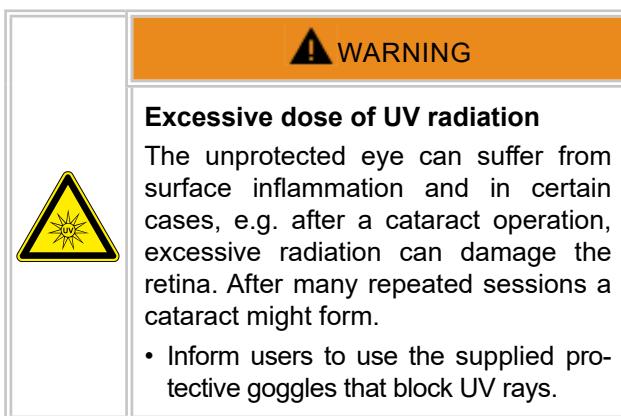

Failure to use protective eyewear may result in severe burns or other eye injury. If discomfort develops discontinue use and consult a physician!

## 7.2 Exposure schedule

Please refer to the following tables for learning the individually applicable tanning times that depend on the skin type.

If the tanning session sequence is interrupted for 4 weeks or more, you will have to start with the first session again.

The interval between two tanning sessions must be at least 24 hours.

The times mentioned in the exposure schedules only apply on the condition that tubes and facial tanners are replaced according to the maintenance intervals stipulated in the section *maintenance intervals*.

- KBL K9S - EXTRASUN - UP / CPI\*

		Week 1 1st - 3rd Sessions	Week 2 4th - 6th Sessions	Week 3 7th - 10th Sessions	Week 4 11th - 15th Sessions	Subse- quent Sess- ions
SKIN TYPE	I	NOT ADVISED				
	II	2	3	5	7	10
	III	2	3	5	8	10
	IV	2	4	6	9	10
	V	2	4	6	10	10
	Maximum exposure is <b>10</b> minutes					

- KBL K9S - HYBRIDSUN - UP / CPI\*

		Week 1 1st - 3rd Sessions	Week 2 4th - 6th Sessions	Week 3 7th - 10th Sessions	Week 4 11th - 15th Sessions	Subse- quent Sess- ions
SKIN TYPE	I	NOT ADVISED				
	II	2	3	4	7	10
	III	2	3	5	8	10
	IV	2	4	6	9	10
	V	2	4	6	10	10
	Maximum exposure is <b>10</b> minutes					

	<ul style="list-style-type: none"> <li>The exposure times stated in this exposure schedule must be entered at the external timer.</li> <li>Information on how to enter the exposure time can be found in the operating instructions of your external timer.</li> </ul>

\* For tube set, see table “Technical data”.

# 8. Tanning mode

 **WARNING**

**Excessive dose of UV radiation**


Excessively prolonged tanning sessions may cause severe damage to skin and eyes.

- Never operate the tanning device with a defective timer.
- Observe the tanning times given in the tanning schedule.

 The following explanations and functions refer to a tanning device that is fully equipped with all features.

Depending on the configuration of the tanning device, different functions are available for you to make your choice.


Your choice remains stored for 3 minutes. If you do not start your tanning session within this time, the system is reset to the default settings defined in the service menu.

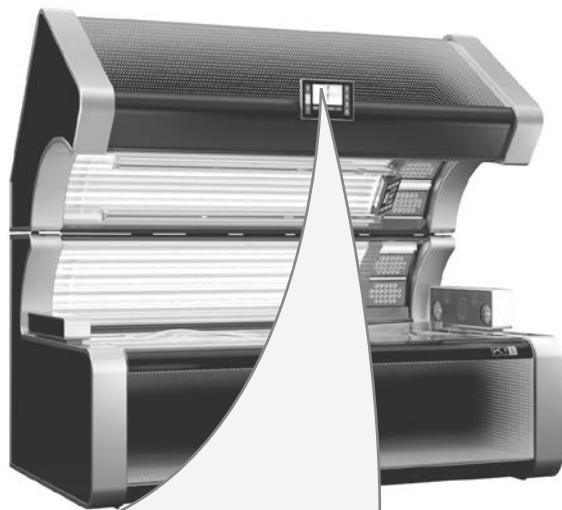


## 8.1 Pre selection at the exterior control panel

Before starting your tanning session, the exterior control panel allows you to choose certain tanning options in advance.

Simply select your preferences and enjoy your tanning session from the very beginning.

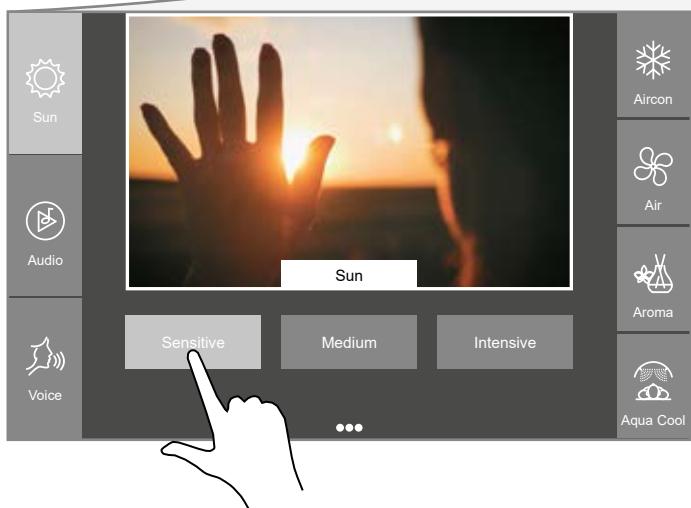

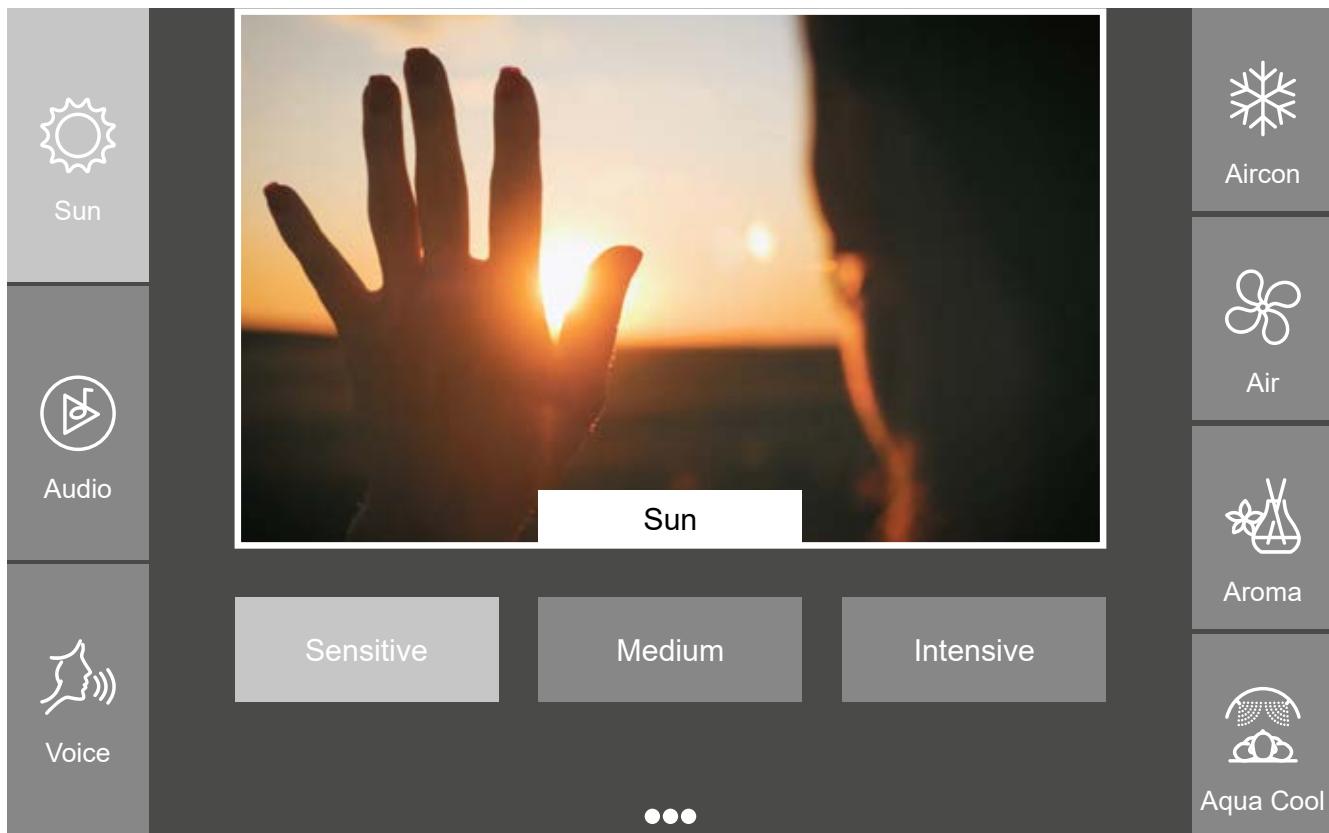


## PRE SELECTION OPTIONS

-  Sun - tanning level pre selection
-  Audio - audio source pre selection
-  Voice on / off
-  Aircon on / off
-  Air Level 1 2 3 / off
-  Aroma on / off
-  Aqua Cool Level 1 2 3 / off

## SYMBOLSTATUS (BEISPIEL)

  	<p>Active options.</p> <p>Option not available.</p> <p>Option deactivated in the service menu or inoperable.</p>
	<ul style="list-style-type: none"><li>• During the fan run-on the pre selection menu is blocked.</li><li>• The default settings of the pre selection menu can be determined in the service menu.</li><li>• In this instruction, the pre selection menu is shown in the color variation "dark mode". Further color variations are adjustable in the service menu.</li></ul>

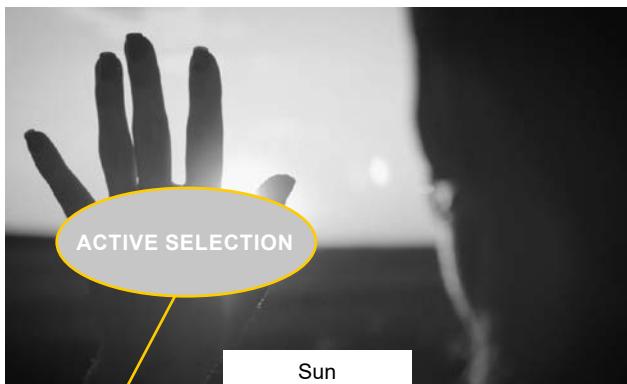
**SUN**


Sun

Sensitive

Medium

Intensive

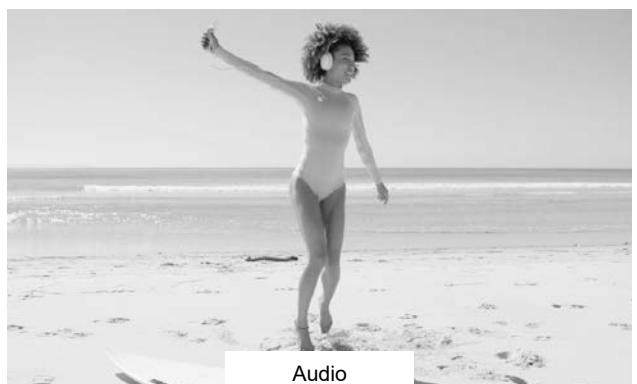**AUDIO**



Audio

Studio

MP3

Bluetooth

Off


**Tanning level pre selection**

Optimum tanning conditions are achieved by targeted influencing of the UV output.

Use the three buttons SENSITIVE, MEDIUM and INTENSIVE to choose your desired preset

**SENSITIVE**

This setting enables gentle tanning and achieves a balanced tanning effect in the long term.

**MEDIUM**

Setting for a somewhat faster tanning success.

**INTENSIVE**

Setting for the maximum available power for a quick and intensive tan.

**Audio source pre selection**

You can preselect one out of three different audio sources.

During the tanning session, you can change the audio source any time via the interior control panel.

**STUDIO**

You will listen to the music that is provided externally by the studio operator.

**MP3 -> MUSIK / RELAX**

During the tanning session, you will listen to the tracks played by the internal MP3 player of the tanning device.


You can choose between music tracks and relaxing sounds.

**BLUETOOTH**


Use your own bluetooth player (smartphone etc.).

**OFF**


Music off.

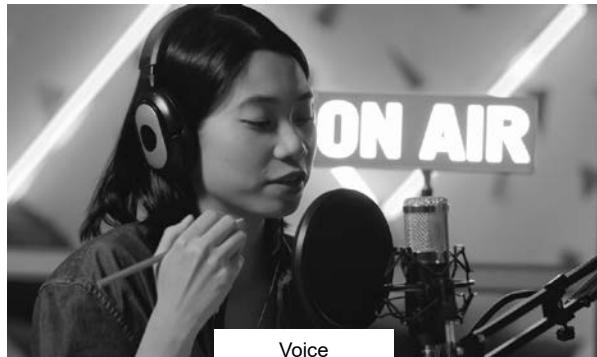**VOICE**

**Voice**

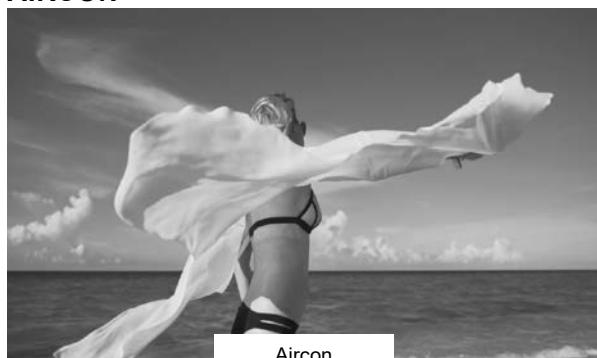
Switches the voice guidance on or off.

**AIRCON**

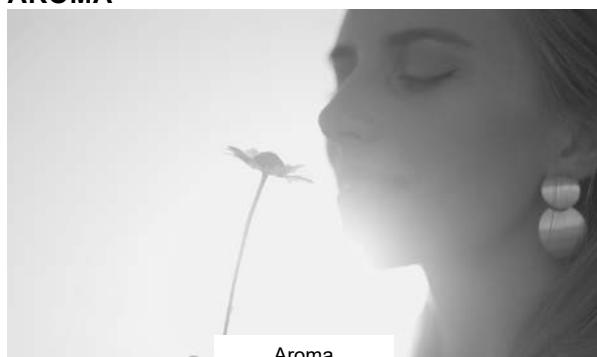**Aircon**


Switches the air-conditioning unit on or off.

**AROMA**

**Aroma**


Switches the aroma function on or off.

**AIR**

**Air**

**Level 1**
**Level 2**
**Level 3**
**Off**
**LEVEL 1 - 2 - 3**

Select air level.

**OFF**

Air off.

**AQUA COOL**

**Aqua Cool**

**Level 1**
**Level 2**
**Level 3**
**Off**
**LEVEL 1 - 2 - 3**

Select intensity of the Aqua Cool spray.

**OFF**

Aqua Cool off.

## 8.2 Starting the tanning session

The tanning session automatically starts after the external timer controlled delay time has expired.

During the preset delay time the tanning session can be started anytime manually using the START button.



as well as after an interruption caused by pressing the STOP button, provided that the booked tanning time has not elapsed yet.

### REMARKS:

- 10 seconds after your last input, the interior control panel switches over to the display of the basic functions.
- Inactive or not available functions are greyed out.
- The interior control panel is displayed in black and white during the tanning session.
- The centered information line shows the current music track / relaxing sound playing.


## 8.3 Stopping the tanning session



The tanning session can be interrupted / stopped at anytime by pressing the STOP button.

## 8.4 Operation during the tanning session

You can control the functions of the tanning device via the interior control panel during the tanning session.

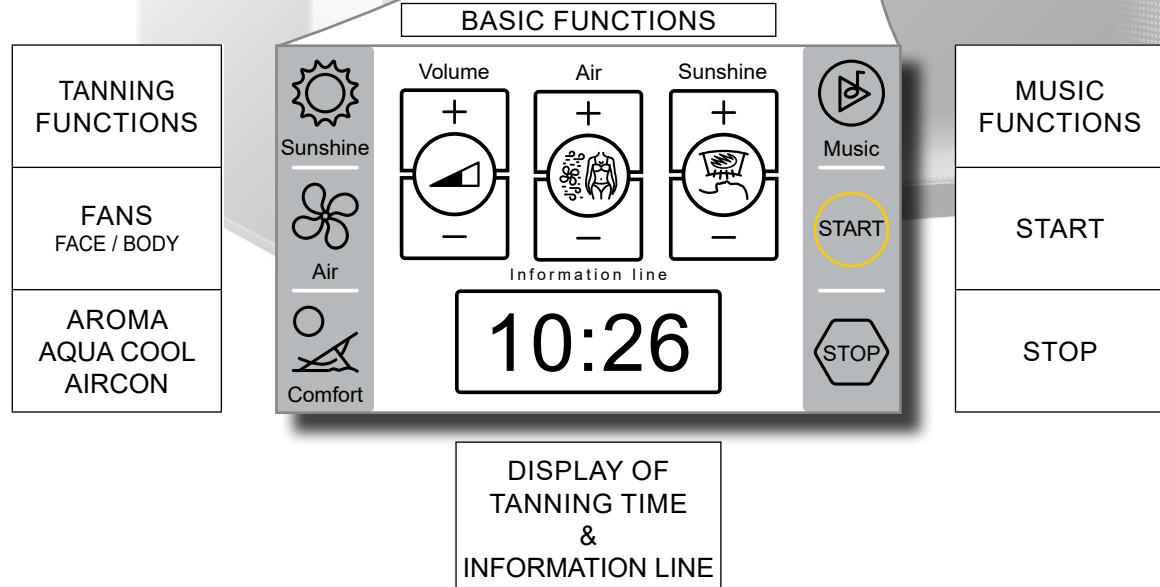


## 8.5 Control elements & functions

Many functions can be changed during the tanning session via the interior control panel.

You can switch them on or off and change settings.

Prerequisite: The functions must be available and activated in the service menu!

### CONTROL ELEMENTS

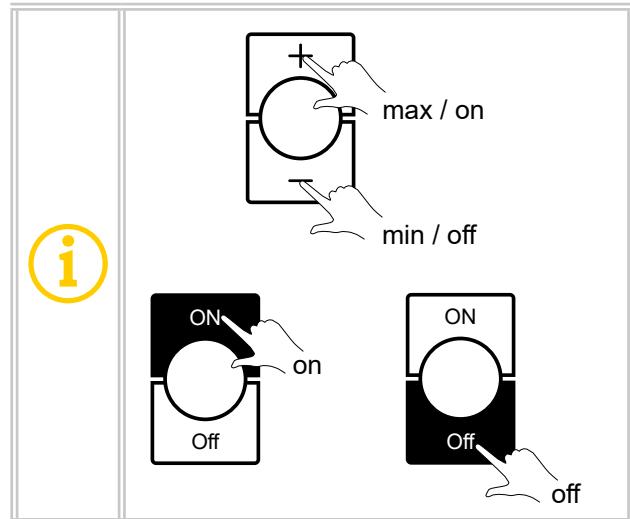

### ICON STATUS (EXAMPLE)




Active function.



Inactive Function (grey)





Function not available, deactivated in the service menu or inoperable.

### VISUALIZATION OF THE CURRENT SETTING (EXAMPLE)

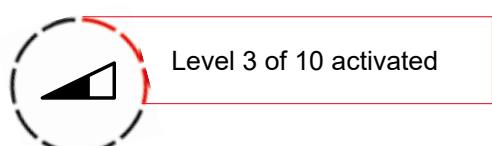


### BASIC FUNCTIONS

During the tanning session, you need quick access to basic functions such as volume control, body fan and standard or Sunsphere facial tanners.

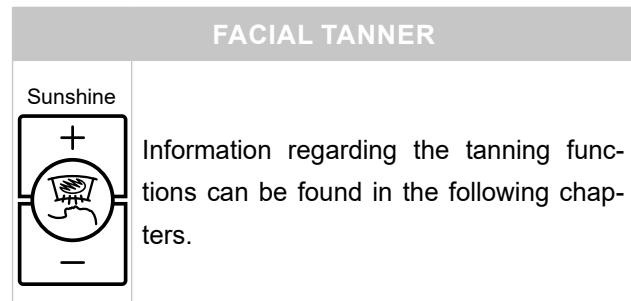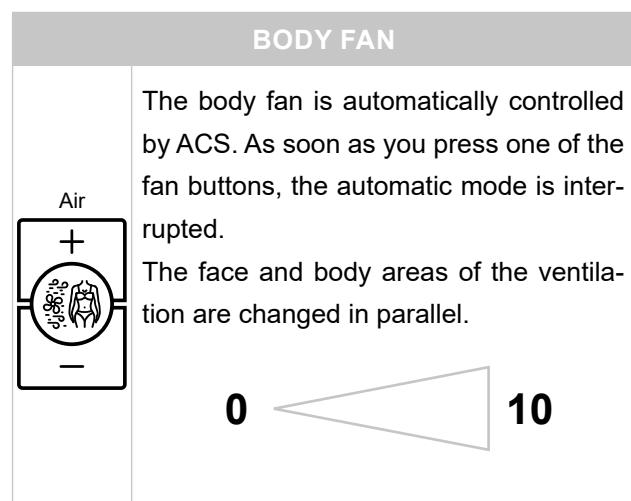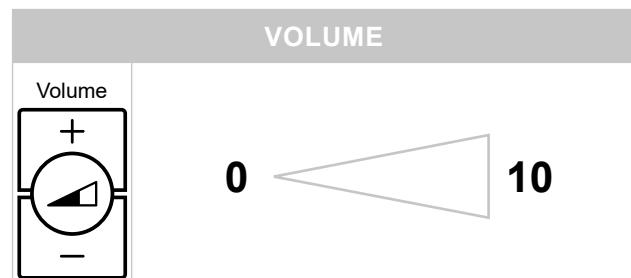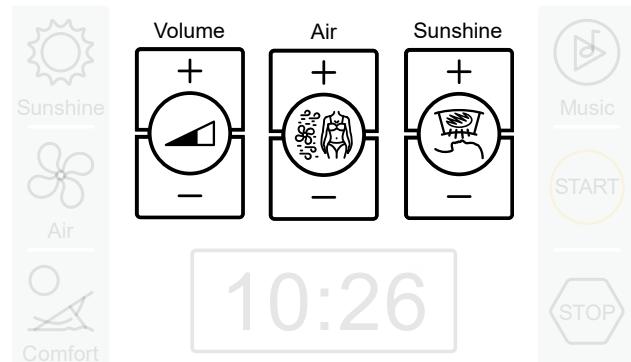

## AUDIO FUNCTIONS

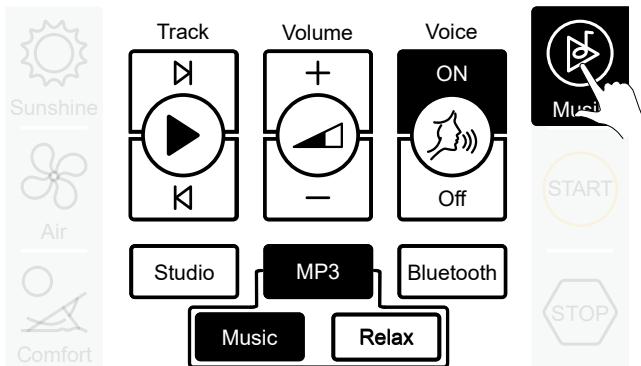

### SELECT AUDIO SOURCE

There is a maximum of three audio sources available:

Studio

This function is used to play the studio music.

If the Studio function has been activated, you can browse through the channels, provided that more than one channel is available.

MP3

This function is used to play the tracks of the internal MP3 player of the tanning device.

If the MP3 internal function has been activated, you can browse through the individual tracks.


You can choose between music tracks and relaxing sounds.

Bluetooth

You can use this function to access a smartphone via Bluetooth.

If "Bluetooth" is activated, you can switch between the individual tracks using the track selection control. The tracks can also be selected by using the corresponding controls on the smartphone.


### VOLUME

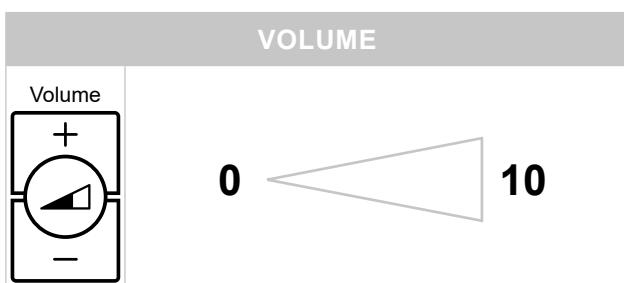


### VOICE GUIDE




## TANNING FUNCTIONS

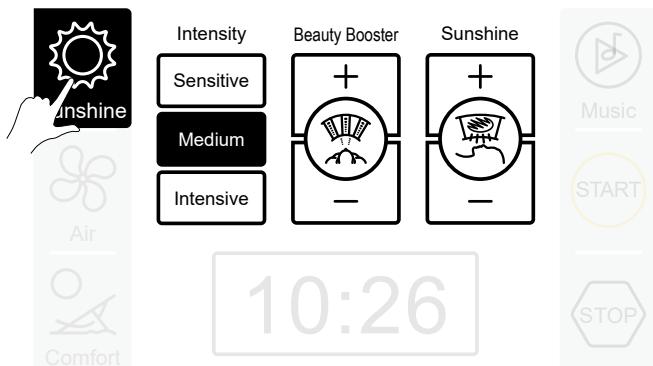

## AIR FUNCTIONS

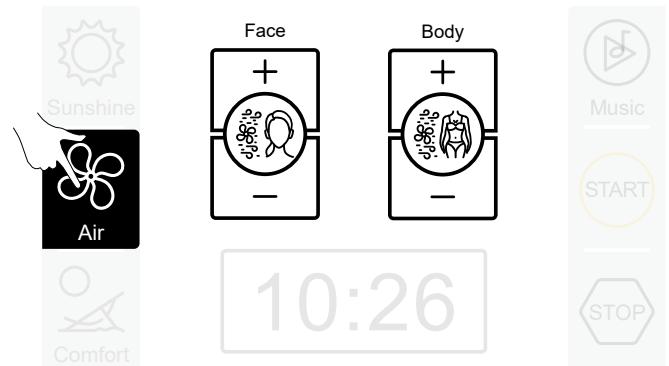


## SWITCH TANNING LEVEL

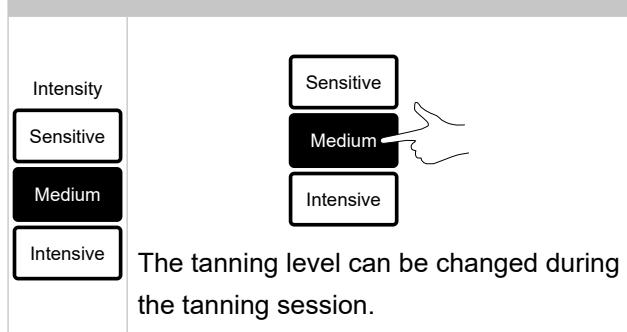

Facial and body fans can be adjusted separately.

## BEAUTY BOOSTER

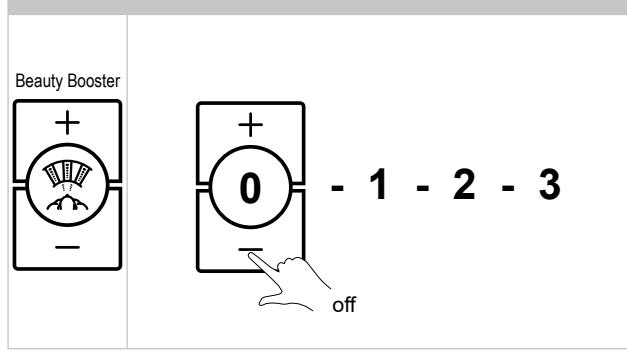

## FAN - FACIAL AREA


0  10




## FAN - BODY AREA

0  10

## SUNSPHERE FACIAL TANNER

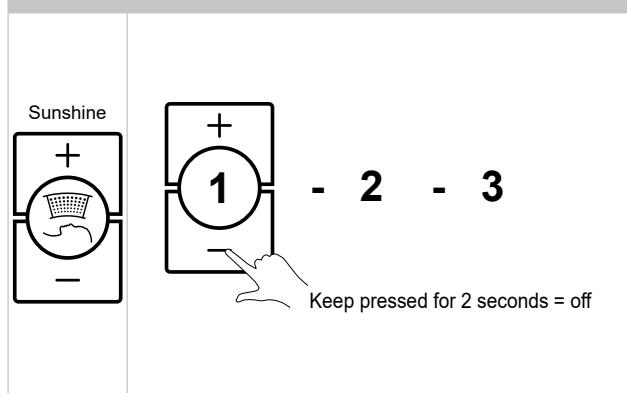


## COMFORT - FUNCTIONS

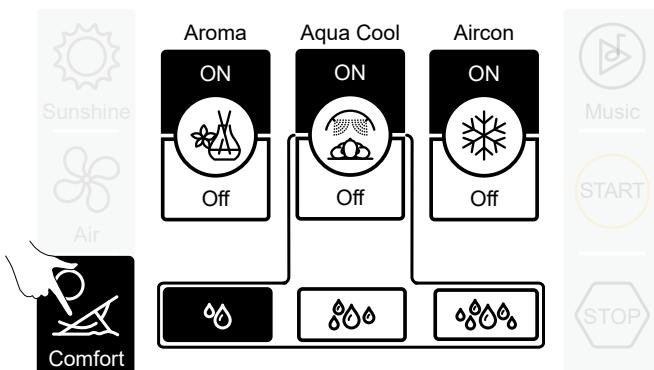

### AROMA




### AQUA COOL

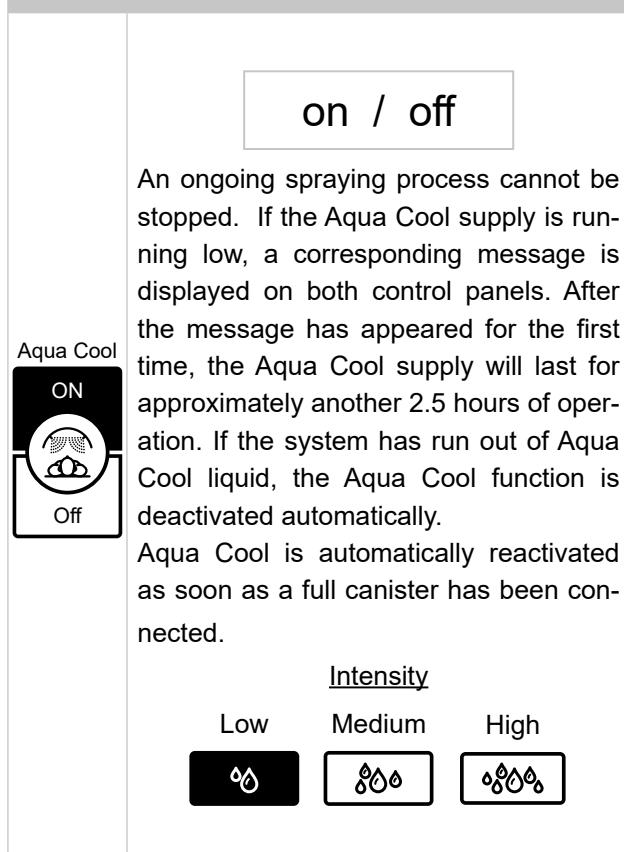

## AIRCONDITIONING

on / off

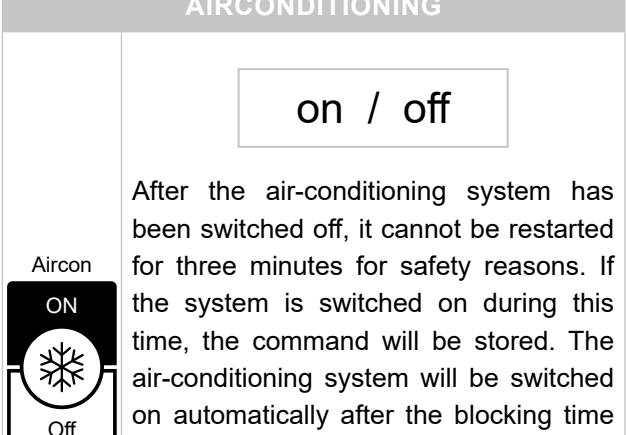

After the air-conditioning system has been switched off, it cannot be restarted for three minutes for safety reasons. If the system is switched on during this time, the command will be stored. The air-conditioning system will be switched on automatically after the blocking time has elapsed. If the condensate canister is full, a corresponding message is displayed on both control panels.

See also the chapter "Maintenance/Air-conditioning system".

# 9. Standby mode

While the tanning device is in standby mode, you can switch the music and decorative lighting of the tanning device on and off and trigger an Aqua Cool spraying test (1 spraying cycle).

## 9.1 Service mode




For service mode information, refer to the "Assembly instructions & Menu settings" guide.

## 9.2 beautyBooster in standby mode

In standby mode beautyBoosters operate as decorative lighting with minimum power. In order to test or demonstrate the three different levels, lighting can be selected and activated via the interior control panel. After 10 seconds beautyBoosters automatically switch back to the decorative lighting level.

### INTERIOR CONTROL PANEL

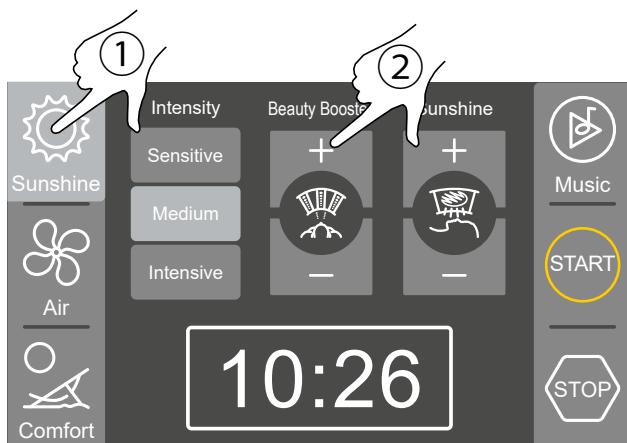

## 9.3 Set decorative lighting

For information on selecting the lighting programs and setting options, refer to the "Assembly instructions & Menu settings" guide.

## 9.4 Standby functions


Press the three dots on the exterior control panel or the STOP button on the interior control panel until the service menu start window appears.

For settings in standby mode, the external timer must be off.


### ACTIVATION ON THE EXTERIOR CONTROL PANEL



### ACTIVATION ON THE INTERIOR CONTROL PANEL

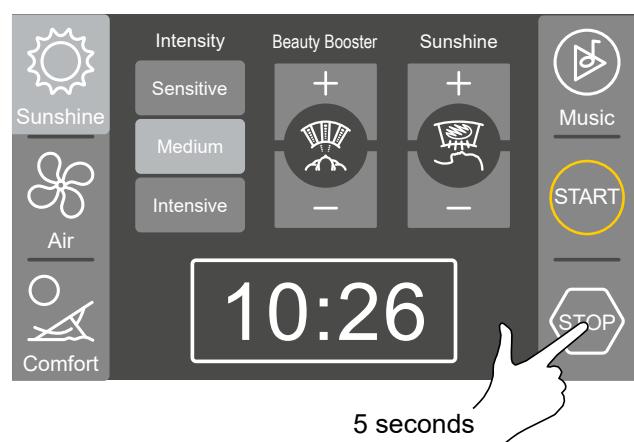

## SERVICE MENU START WINDOW

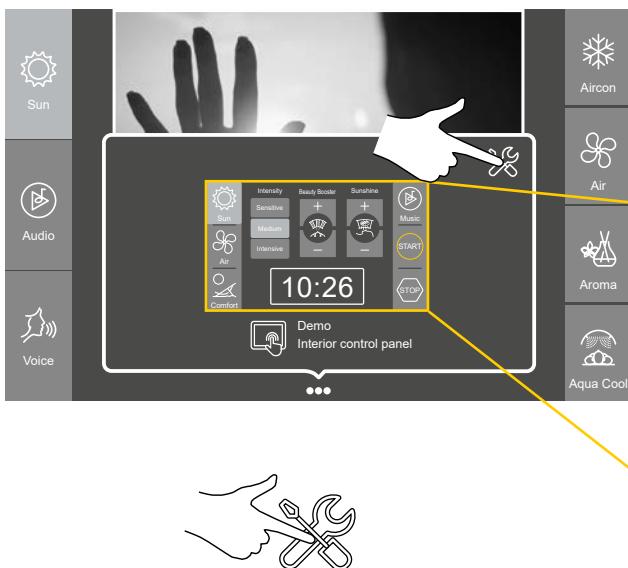


### DEMO INTERIOR CONTROL PANEL

The display of the interior control panel can be shown on the exterior control panel for demonstration purposes.

- This makes it convenient, for example, to instruct the tanning customer.

## STANDBY FUNCTIONS

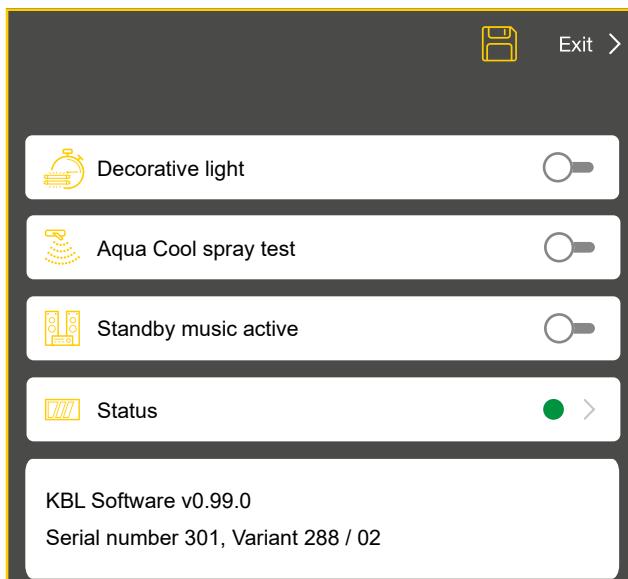

Decorative light on / off.

AquaCool spray test.

Standby music on / off.

Call up status messages.

- All OK
- Need for action soon
- Imminent need for action


#### Information section with current unit data

- Software version
- Unit serial number
- X-Code (variant code)



- The switching times of the decorative lighting can be set in the service menu individually for each day of the week. Two independent switching phases are available for each day of the week.
- The function „Standby music active“ must be activated in the service menu.
- For service mode information, refer to the "Assembly instructions & Menu settings" guide.

## STATUS MESSAGES

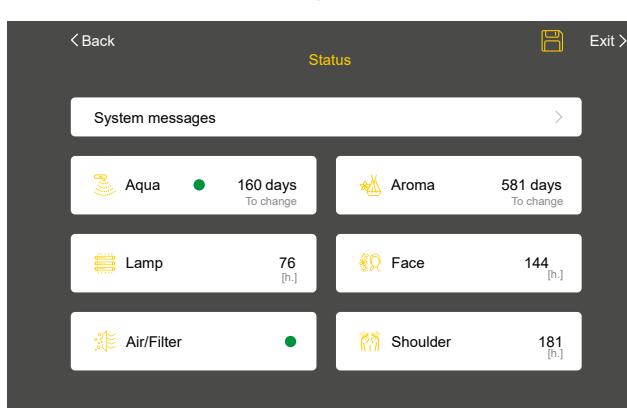

## System messages

22.04.2022 08:10:51 Info	Tanning session ended
22.04.2022 08:05:22 Info	Application started
27.04.2022 09:11:01 Info	Dali-Bus initialised
28.04.2022 11:01:58 Error	Entered Service Code incorrect
02.05.2022 08:44:32 Info	Application started

Display of the latest system messages (information and error messages).



Display of remaining usage time in days, calculated on the basis of previous usage behaviour.

- All OK.
- 80 % Aqua Cool capacity remaining.
- Change Aqua Cool canister.



Display of operating hours of the tubes.



Display of remaining usage time in days, calculated on the basis of previous usage behaviour.

After expired usage time -> Replace aroma tin.



Display of operating hours of the facial tanners.



Status of the air filter cartridges.

- All OK.
- Cleaning pending (after 80h).
- Cleaning (after 100h).




Display of operating hours of the shoulder tanners.

## 9.5 Video function

Videos and images can be displayed on the exterior control panel in standby mode.

### Playlists

- Two different playlists (Playlist Start & Playlist End) are available for before and after the tanning session.
- The user can add videos or images to these playlists, delete them, or change their play sequence.
- Tap the touch screen to return to the menu at any time.

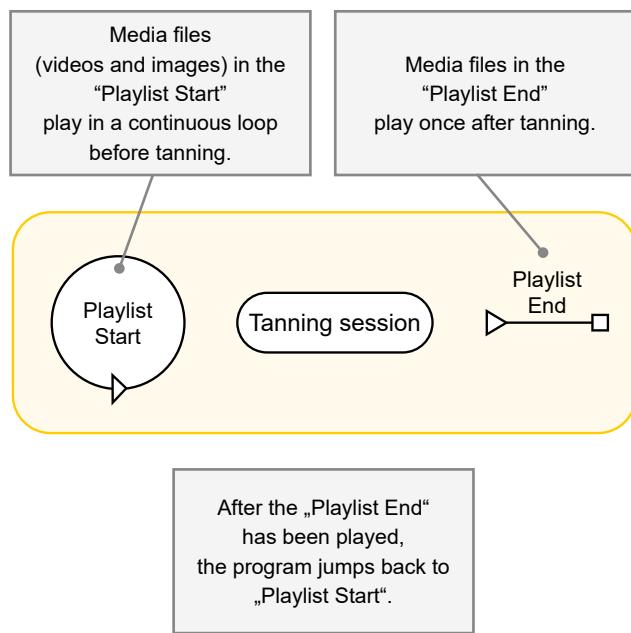

	For service mode information, refer to the "Assembly instructions & Menu settings" guide.
---	---

# 10. Maintenance and cleaning

Regular maintenance as shown in chapter *Maintenance intervals* is required for the safe operation of the tanning device and must be documented.

- The current operating hours of the tanning device and its parts requiring maintenance, may be displayed in the service menu. Please refer to chapter "Service menu" in the assembly instructions.
- Cleaning and disinfection operations are carried out in accordance with the cleaning and disinfection plan.
- Maintenance work may only be carried out by qualified, trained and authorized service technicians.
- Do not reach behind covers and do not open the tanning device with the device switched on.

- Use OEM spare parts of the same type only! The use of other parts will void the manufacturer's warranty!
- In case of damage or injury proven to be the result of the use of non-genuine spare parts any liability is excluded.
- Replace UV-lamps only with the ones that are characterized on the tanning device. The use of other UV lamps will void the operating license!
- Only use original KBL ballasts for CPI-Energy tanning devices.



 **WARNING**

**Injuries and damage caused by improper or insufficient maintenance**

Maintenance and care play a major role for the tanning devices performance and appearance over its useful life. Diligent compliance at the specified intervals is absolutely necessary to ensure the proper operation of your tanning device. Improper maintenance can cause the tanning device to be damaged or to become unusable. Always comply with the specified maintenance intervals. Refer to the following information given in this chapter.

- Please note that the tanning device must be inspected regularly by an authorized KBL representative every 12 months from the date of the last inspection to maintain its proper condition.
- If the tanning device is in use for longer than 10 years, it must be completely overhauled by qualified, trained and authorized service technicians.
- If the tanning device has not been used for a longer period of time, then it must first be inspected by qualified, trained and authorized service technicians before being put back into operation.

## MAINTENANCE DOCUMENTATION

- Establish an accurate record-keeping system for the maintenance reports.
- Ensure that all maintenance periods have been fully complied with and documented as described in chapter „Maintenance intervals“ in the operating instructions.

## DISCONNECT MAINS VOLTAGE



- Before carrying out any maintenance work, the tanning device must be disconnected from the mains voltage. That means that all live cables must be switched off. Switching off the tanning device alone is insufficient, as certain points may remain energized. Therefore, switch off fuses before performing any work and – if possible – remove them.

## ADDITIONAL PROTECTIVE MEASURES

Accidental reactivation may result in serious accidents. After deenergizing, immediately secure all switches and fuses used for deenergizing against being switched on again.

- Unscrew circuit breakers.

Where circuit breakers cannot be unscrewed, a strip of adhesive tape can be applied over the actuation lever with the wording:

**DANGER - DO NOT SWITCH**

A sign with the text:



must always and immediately be securely mounted.


- It is essential that you, the owner, and / or the studio operator check all components for signs of wear that can occur during normal use.

- After completing the work, refit all safety devices (e.g. switches).


## CLEANING MESSAGE

After completion of a tanning session, the message appears at the exterior control panel:

"Please clean device! Press OK-button when finished."

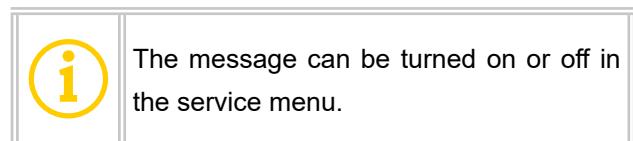

## SUNSPHERE SYSTEMS

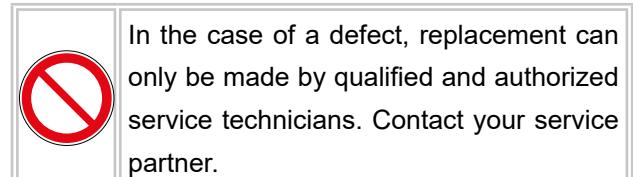

## 10.1 Instructions on cleaning, disinfection and care

### GENERAL INSTRUCTIONS

Before starting to clean the tanning device, take off any rings, bracelets, watches, etc. that you might be wearing, in order to avoid scratching the surfaces of the tanning device.



- Do not use concentrated disinfectant, solvent or alcoholic liquids.
- Cleaning fluid and/or disinfectant must not run into the tanning device.

### APPLICATION

These symbols have the following meaning.

Apply the cleaning agent on the chamois or cloth and not directly on the surface.



## CLEANING AND DISINFECTION

### WARNING

#### **Risk of Infection.**

Risk of Infection by transferring through skin contact.

- **After each tanning session the tanning device must be cleaned and disinfected with a cleaning and disinfectant agent.**
- Use only EPA registered quaternary ammonium germicidal based detergent solution (follow product label for use-dilution), such as Lucasol One Step, to clean and disinfect the tanning device and its components.
- For thorough cleaning and disinfection, the product must be allowed to remain in contact with the surface being cleaned and disinfected for a specified amount of time. This specified amount of time depends on the cleaner/disinfectant which is used. Follow the directions for use of the cleaner/disinfectant. After this specified application time remove remaining cleaner/disinfectant from the surfaces of the tanning device. Use a single-pass paper towel.
- If the device is determined not to be visually clean at the end of the cleaning step, the relevant previous cleaning steps must be repeated so that a visibly soiled device is not used again. Removal of residual soil ensures the effectiveness of the disinfection process and reduces the risk of infection to users of the device.



## ADDITIONAL CLEANING ACTIVITIES

### WARNING

These cleaning works must be carried out by qualified, trained and authorized service technicians.

#### Every 6 months

Make sure that the inside and outside of the tanning device is cleaned and free from dust, fluff or objects.



Inadequate cleaning leads to overheating. As a result, this can lead to damage the tanning device!

#### **Signs of electrical overstress**


Check the cables and connections on signs of electrical overstress.




- **Discoloration**
- **Deformations**
- **Melting**
- **Blisters on the housing**

The affected components shall be replaced immediately! Use only OEM spare parts.

## CLEANING AND DISINFECTION PLAN

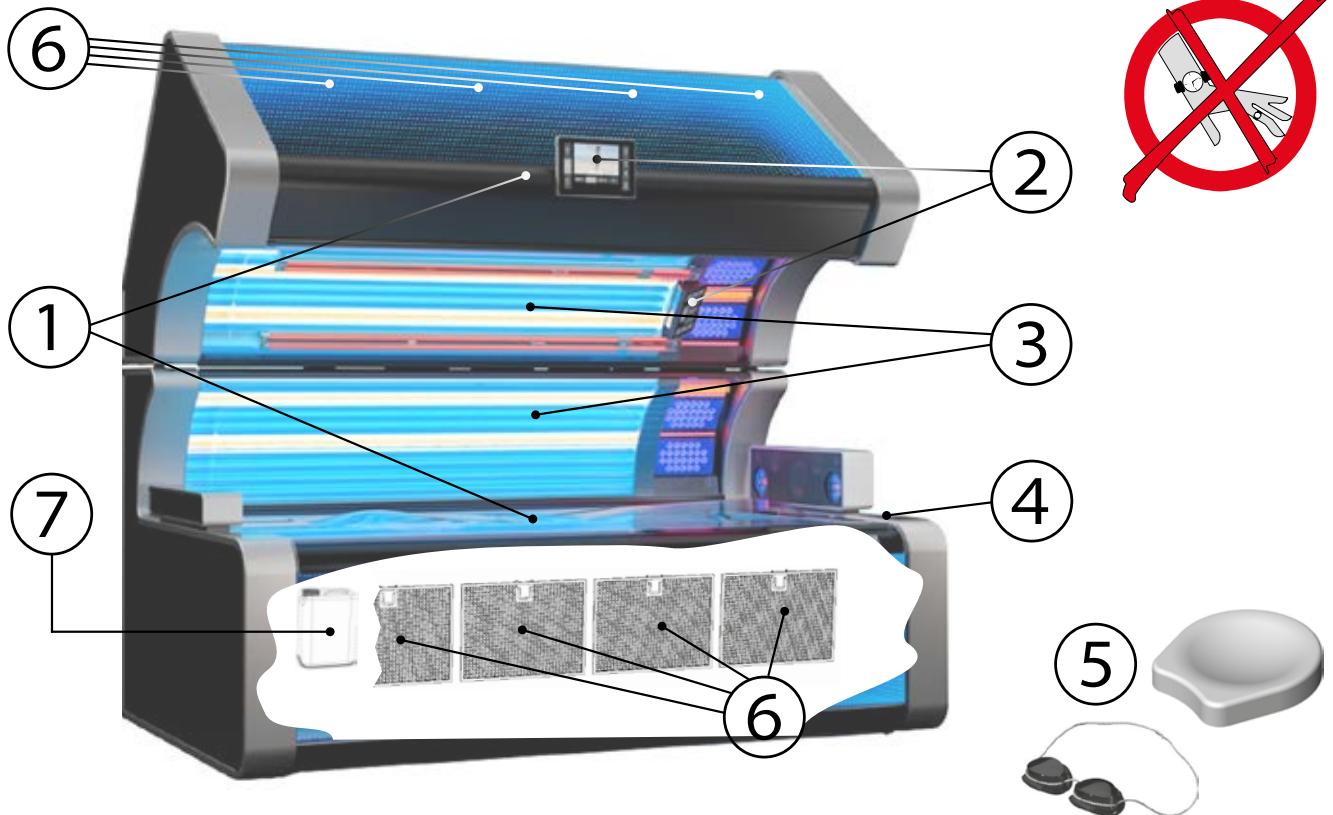

	Part	Application	Cleaning and disinfection activities	Interval
①	Bed pane & handles	Directly on the surface	Clean these parts with single-pass paper towels. Use only EPA registered quaternary ammonium germicidal based detergent solution (follow product label for use-dilution), such as Lucasol One Step, to clean and disinfect the tanning device and its components.	
②	Control panels	 	For thorough cleaning and disinfection, the product must be allowed to remain in contact with the surface being cleaned and disinfected for a specified amount of time. This specified amount of time depends on the cleaner/ disinfectant which is used. Follow the directions for use of the cleaner/disinfectant. After this specified application time remove remaining cleaner/ disinfectant from the surfaces of the tanning device.	After each session
③	Canopy pane and side pane	Directly on the surface		
④	Smartphone placement area	 		
⑤	Protective goggle and neck pillow	 		
⑥	Air filter inserts	-	Remove the inserts and rinse out under running water.	100 operating hours
⑦	Condensate canister	-	Empty the condensate canister if a corresponding message is displayed at the interior control panel.	-
	Tubes	 	Remove tubes and clean them with a damp chamois.	
	Facial-/shoulder tanner, beautyBoosters	 	Clean them with a damp chamois.	200 operating hours
	Chromed parts	-	Clean with a damp chamois and a cleaning agent for acrylic plastic (antistatic).	When required
	Plastic surfaces and varnished surfaces	-	Clean with a damp soapy cloth. Never clean with a dry cloth!	When required

## 10.2 Maintenance intervals

### MAINTENANCE PLAN

Component	500 h / 6 months	1500 h / 1 Year	2000 h / 1 Year	10000 h / 4 Years	10000 h / 10 Years	Activity
Acrylic pane (bed)	X					Inspect and replace as necessary
		X				Replace
Acrylic panes (others)	X					Inspect and replace as necessary
		X				Replace
Springs of the canopy drive		X				Inspect and replace as necessary
			X			Replace
Chassis and associated fasteners		X				Inspect and replace as necessary
			X			Replace
Wiring and associated plugs / terminal connections		X				Inspect and replace as necessary
			X			Replace
Contactors		X				Inspect and replace as necessary
			X			Replace
Aqua Cool filter		X				Replace

Component	After approx. 200 operating hours	After approx. 500 operating hours	After approx. 1000 operating hours	After approx. 3000 operating hours	Activity
Air hoses		X			Inspect and replace as necessary
Air-conditioning unit		X			Clean the heat exchangers and check the condensate pump.
Aqua Cool nozzles	X				Inspect and replace as necessary
			X		Replace

Component	Activity
Tubes CPI	X Replace
Aqua Cool canister	Replace as soon as the corresponding message appears.
	Replace if expired.

Additional or recurring inspections	
Every 6 months cleaning service	Make sure that the inside and outside of the tanning device is cleaned and free from dust, fluff or objects. See chapter -> Additional cleaning activities.
Every 12 months inspection	Please note that the tanning device must be inspected regularly by a KBL authorized representative every 12 months (from date of installation) to maintain its proper condition!.
10 Years inspection	If the tanning device is in use for longer than 10 years / 10000h, it must be completely overhauled by qualified, trained and authorized service technicians.
On start up	If the tanning device has not been used for a longer period of time, then it must first be inspected by qualified, trained and authorized service technicians before being put back into operation.

## 10.3 Tools and aids

 4	Hexagon socket screwdriver (SW 4 / 60 mm)
 PH2	Standard Phillips screwdriver (PH2)
 OK	Finally acknowledge a process by pressing the OK button.
	Number of qualified, trained and authorized service technician required for this maintenance task.

The following chapters describe the work steps required for carrying out maintenance and care actions.

At the beginning of each chapter, the required tools and aids are depicted.


The assembly is basically carried out in reverse order of the disassembly. Exceptions are especially pointed out.

If you open the bench part or one of the acrylic panes, you must, after closing, acknowledge a warning message.

## 10.4 Unlocking the bed

				
---	---	--	--	--


	<b>Attention</b>
	The bed must only be opened with bed pane folded down.

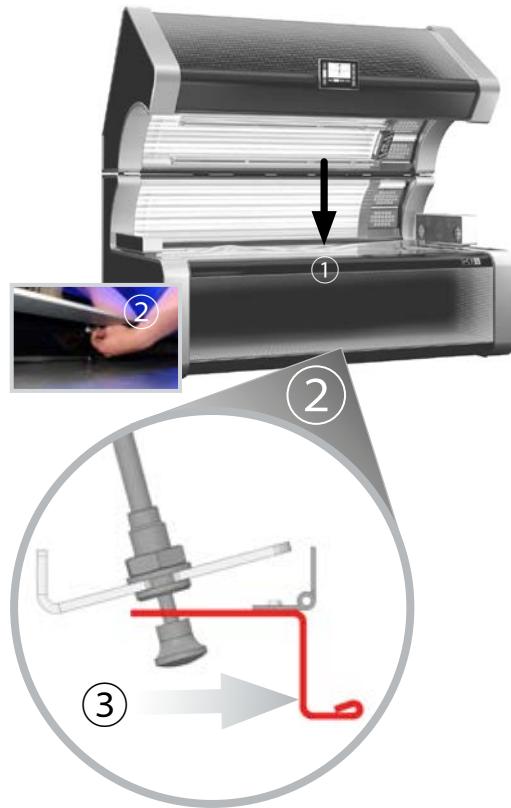

	Fold up the canopy.
	Press the bed slightly downwards and keep it pressed.
	Reach into the lower gap positioned in the middle of the front panel.
	Pull the lever to unlock
	Fold up the bed.


## 10.5 Acrylic panes

### FOLDING UP THE BED PANE

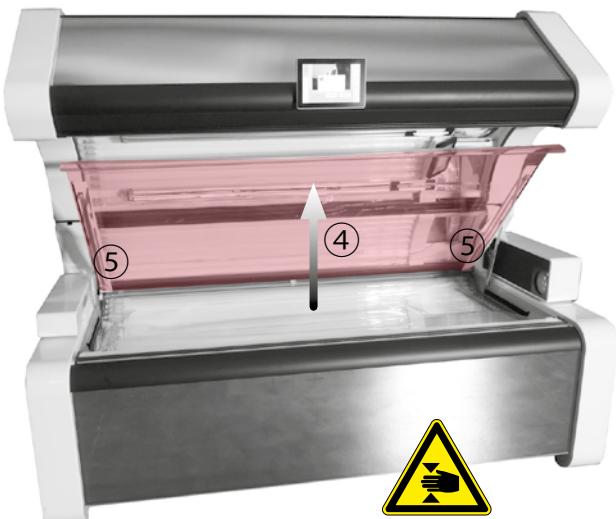

④ Hold the bed pane in the middle of the front edge and lift it.

⑤ Lock it in place using the lateral support plates.

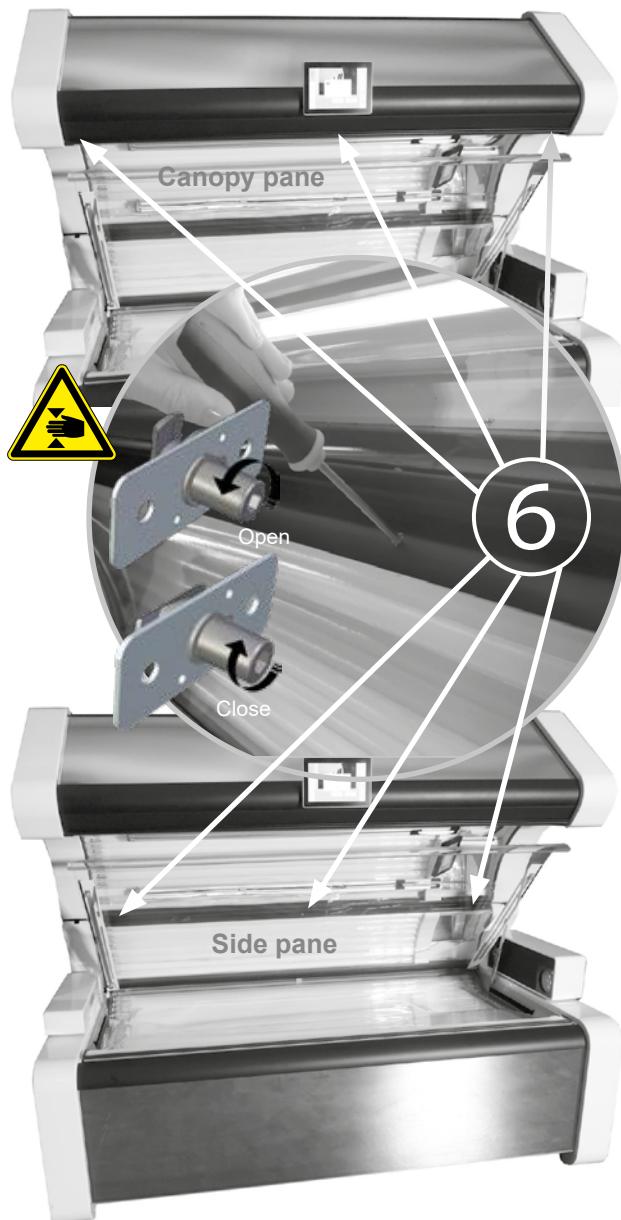


### FOLDING DOWN THE CANOPY PANE / SIDE PANE



#### Attention

Prevent the pane from falling down when opening it!

- Open the middle pane lock at last.

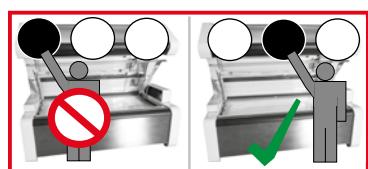

⑥ Open the 3 locking spigots by using the hexagon socket screwdriver supplied by KBL.  
**Observe the order!**

⇒ Fold the pane down.

#### NOTE - CLOSING THE PANES



## 10.6 Tubes

4



- When installing the tubes, make sure that the tube inscription is visible. If it is installed in a different position, there will be no tanning effect.
- After new tubes have been installed, the operating hours of the tubes must be reset in the service menu.

### ⚠ WARNING


#### Injuries and damage due to improper maintenance



The share of harmful UVB radiation may increase when the maintenance intervals for the UV lamps are exceeded or incompatible UV lamps are installed. As a result sunburn and other skin damage may occur.

- Always comply with the specified maintenance intervals, see chapter maintenance intervals / maintenance plan.
- Follow the cleaning / disinfection instructions.

### TUBE REPLACEMENT IN THE BED PART

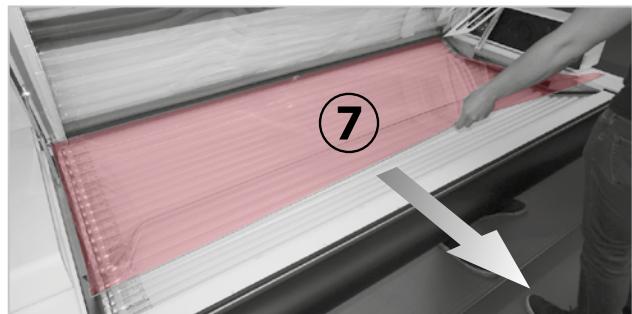

⇒ Open the bed pane.

⇒ If the tanning device is equipped with an air-conditioning unit, remove the ducting pane.

⇒ Remove the tubes.

### TUBE REPLACEMENT CANOPY / SIDE PART

⇒ Fold the canopy and / or side pane down.


⇒ Remove the tubes.

## 10.7 LED light sources

### LED - FACIAL / SHOULDER TANNER AND BEAUTY BOOSTER

In the case of a defect, replacement can only be made by qualified and authorized service technicians. Contact your service partner.

### REMOVING TUBE



## 10.8 Filter cartridges



The cooling air for canopy and bed is filtered. Your tanning device is equipped with filter cartridges and continuous-service filter inserts. Therefore, purchase and replacement of conventional filter pads are not required. Clean the filter inserts after approx. 100 hours of operation, depending on the local circumstances. Vacuum the filter inserts or use a dishwasher.



There are four filter cartridges each in the canopy and in the bed part.

### REMARK

Take the opportunity and check and clean the heat exchangers of the air-conditioning unit (See also the chapter "Maintenance/Ventilation and air-conditioning". Soiled heat exchangers substantially reduce the performance of the air-conditioner.




- Install the filter cartridges with the retaining clips faced outwards.
- The filter cartridges must be dry when installed.

### FILTER CARTRIDGES IN THE CANOPY PART




⇒	Open the bed part.
⑧	Open the lock of the filter cartridge.
⇒	Remove filter cartridge.

### FILTER CARTRIDGES IN THE CANOPY PART

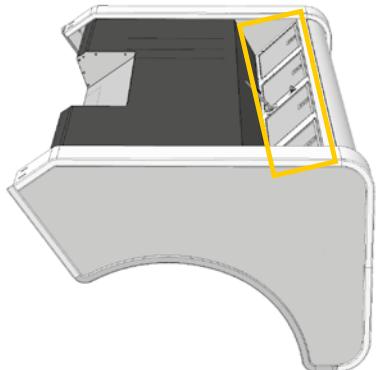

### REMOVE FILTER CARTRIDGE

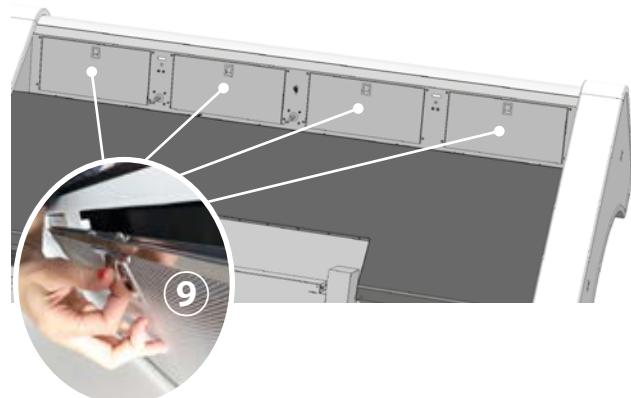

⇒	Fold down the canopy.
⑨	Open the lock of the filter cartridge.
⇒	Remove filter cartridge.

	Installation instructions for filter cartridges: -> Lock always faced outwards!
---	--

## 10.9 Ventilation and air-conditioning




OK

In order to preserve the performance of the air-conditioning unit, clean the heat exchangers after 500 - 600 hours of operation.

To clean the heat exchanger, the front of the tanning device must be removed.

- Refer to the "Assembly instructions & Menu settings" guide.

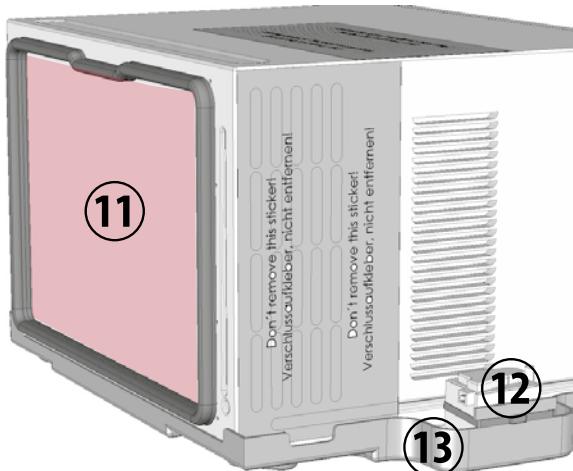

⑪ Heat exchanger

⑫ Condensate pump

⑬ Condensate tray

⇒ Open the bed part.

⑪ Clean the heat exchanger.

🚫 Vacuum it carefully, paying attention not to damage the fins.

### SERVICING THE VENTILATION SYSTEM

 The ventilation ducts inside the tanning device are made of **maintenance-free** moulded plastic parts.

 The air outlet hose must not exceed a maximum length of 6 m if there is no auxiliary fan installed.

### CHECKING THE CONDENSATE PUMP

The condensate pump ⑫ pumps away the condensation water at timer-controlled intervals. Check the function of this pump with each tube replacement.

⇒ Fill some water into the condensate tray ⑬. Use a hose and a funnel to do so.


🚫 Make sure that the water does not spill over.

⇒ Start a tanning session and then wait for 20 minutes.

⇒ The filling level of the tray must then be below the pump level.

### EMPTYING THE CONDENSATE CANISTER

The condensate pump transports the condensation water into a canister via a hose. Once this condensate canister is full, a corresponding message is displayed. The air-conditioning symbol flashes (check), and the air-conditioning unit switches off shortly afterwards.

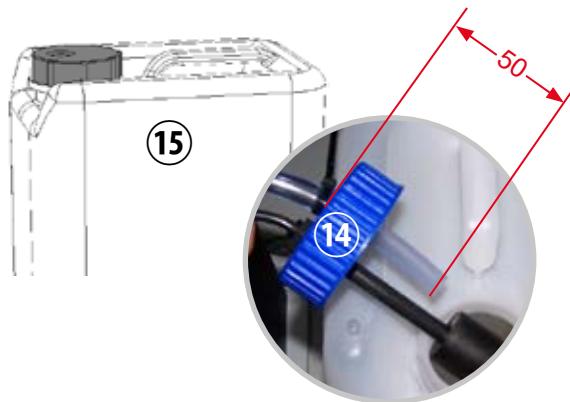


⑭ Unscrew the closing lid of the condensate canister.

⑮ Empty the condensate canister.

🚫 When closing, make sure that the condensate hose is inserted a max. of 50 mm into the canister.


⇒ Finally, acknowledge the aircon message on the interior control panel (START).

## 10.10 Aroma and Aqua Cool

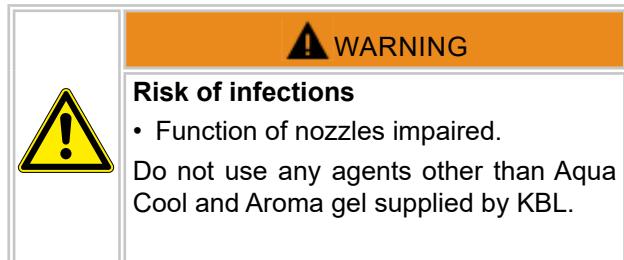

### REPLACING THE AQUACOOL CANISTER


- If the fluid level drops to a minimum, a message appears.
- If the Aqua Cool canister is empty, corresponding messages are displayed, and Aqua Cool switches off

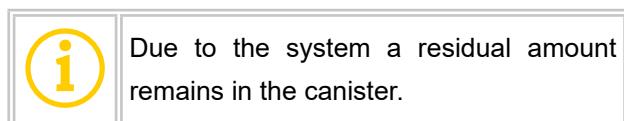

⇒	Open the bed part.
16	Unscrew the lid.
🚫	Keep the hose end including the lid in a clean plastic bag while replacing the canister.
17	Replace the canister.
⇒	Start Aqua Cool initialization (service menu).

### REPLACING THE AROMA TIN

When the Aroma tin is empty, a message appears.

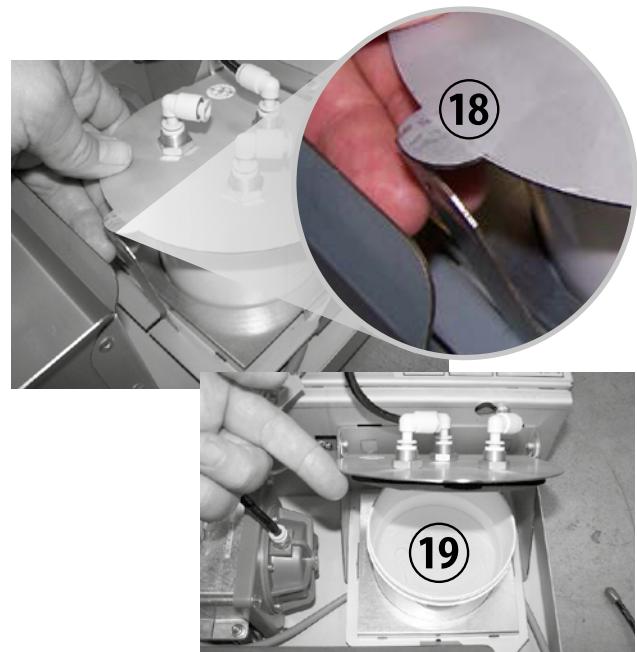

⇒	Open the bed part.
18	Unlock the retaining bracket.
19	Replace the tin.
⇒	Reset the Aroma counter in the service menu.

## 10.11 Replacing the Aqua Cool nozzles

After 1,000 hours of operation, the Aqua Cool nozzles must be replaced in order to ensure that the Aqua Cool system functions properly. The assembly instructions are included with your spare parts delivery.

# 11. System messages

ERROR MESSAGES			
All error messages must be acknowledged with the <b>OK</b> button!			
No.	Status message	Description	Remedy
004	Mains frequency off limit. Safety shutdown!	A deviation was detected in the mains frequency. Device has been switched off for safety reasons.	Restart the control unit. Contact service after the third unsuccessful restart.
005	Canopy open. Please close to return to normal operation.	Contact of the canopy pane and/or of the filter cartridge cover has triggered.	Close canopy pane, check filter cartridge cover and contacts.
006	Side open. Please close to return to normal operation.	Contact of the side pane has triggered.	Close the side pane and check the contact.
007	Bed open. Please close to return to normal operation.	Contact of the bench pane has triggered.	Close the bench / bench pane and check the contact.
008	The maximum tanning time is exceeded	Coin-box system contact longer than the value enabled under maximum tanning time (voltage applied).	Disconnect from the coin-box system.
009	Canopy overtemperature. Please check the ventilation system.	Canopy overtemperature.	Let the tanning device cool down. Check filter inserts and clean if necessary. Check the canopy ventilation system.
012	Overttemperature shoulder area. Please check the ventilation system.	Overttemperature shoulder area.	Let the tanning device cool down. Check fan freewheeling. Check the ventilation system in the air outlet.
013	Air outlet overtemperature. Please check the ventilation system.	Air outlet overtemperature.	Let the tanning device cool down. Check fan freewheeling. Check the ventilation system in the air outlet.
044	Connection error control board	No response from CAN-BUS Receiver.	Check / replace patch cable.
045	Connection error DALI board		
046	Connection error EC fan board		
047	Auxiliary AC-fan control board could not be started		
051	Stop switch is activated. Start of tanning not possible.	Emergency stop button (right side cap) is activated or jammed.	Deactivate the emergency stop button or check the function.
052	DALI board could not be started.	Defect of the DALI circuit board.	Contact your customer service.
054	Connection error AC fan board	No response from CAN-BUS Receiver.	Check / replace patch cable.
055	Control board could not be started	Defect of the control board.	Contact your customer service.

## INFORMATION MESSAGES

All information messages must be acknowledged with the **OK** button!

No.	Information message	Description	Remedy
032	Communication error KBL-DALI channel 1	Communication error Dali Kanal X adress Y	Contact your customer service.
034	Aqua Cool liquid container is almost empty. Please replace.	The content of the Aqua Cool canister is still sufficient for a few operating hours.	Replace the empty Aqua Cool canister with a full one. Do not replace Aqua Cool with any other liquid. See chapter: Aroma- and Aqua Cool.
035	Aroma supply exhausted. Please renew.	System has run out of scent.	Replace the Aroma tin. See chapter: Aroma- and Aqua Cool.
036	Condensate container is full. Please discharge.	Condensate canister of air-conditioning unit full.	Empty the condensate canister.
039	SD card unavailable. No user data can be stored.	No access to the SD card in the computer board.	Check SD card and replace if necessary.
048	Invalid code	Access code to the service menu not correct.	Enter correct access code.
049	Software update failed. Please check the log messages.	Software update failed. No new software could be uploaded.	Check USB stick / Internet connection.
054	Connection error AC fan board	No response from CAN-BUS Receiver.	Check / replace patch cable.
055	Control board could not be started	Defect of the control board.	Contact your customer service.



If the remedial measures described here are unsuccessful, contact your service partner.

# 12. Technical data



Ambient conditions		
<b>Installation site</b>	<ul style="list-style-type: none"> <li>• In dry rooms (booths) with sufficient airing and ventilation</li> <li>• Maximum relative air humidity: ≤ 70 %</li> <li>• Maximum room temperature: ≤ 86°F (30°C)</li> </ul> <ul style="list-style-type: none"> <li>• Minimum height of the room: ~92,96 inch</li> <li>• Only on a non-combustible basement</li> <li>• Maximum operating altitude: ≤ 6500 ft</li> </ul>	
Weights and measures		
<b>Dimensions in inches (Height x width x depth)</b>	~63" x ~90,56" x ~59,22" (closed) ~86,26" x ~90,56" x ~56,3" (open)	
<b>Bed pane max. load capacity</b>	330 lbs	
<b>Weight</b>	~1488 lbs (with air conditioning)	
Electrical connection values		
<b>Protective class</b>	IP20	
<b>Mains voltage</b>	3-phase: 3 x 220 V / ~ / 60 Hz	
<b>Wire cross section</b>	3-phase: 4 x AWG6 THHN cable in a isolation tubing (e.g. flexible metallic conduit, utilizing appropriate connectors)	
<b>Circuit breakers</b>	3-phase: 3 x 50 A - For Canada, all tanning devices must be equipped with a Class-A ground fault circuit interrupter (GFCI).	
<b>MP3-Player</b>	<ul style="list-style-type: none"> <li>• Supports SDHC and SDXC Micro-SD-Cards</li> <li>• Supported file system (SD-Card): FAT32</li> </ul>	
Exhaust air mode		
<b>Fan / blower</b>	Air outlet socket Ø 300mm (~11,81 inch) -- 80,95 inch (top) Minimum air outlet flow rate: 2250m³/h (594400 gal/hour)	
<b>Air outlet duct hose</b>	Ø 300 mm (~11,81 inch)	

**Unit data: KBL K9S**

<b>K9S extraSun - Ultra Power - CPI</b>		<b>Item no</b>
Tubes	Canopy: 16x pureSunlight 1723 R 200W 4x extraSunlight 1711 R 200W Side: 8x pureSunlight 1723 R 200W 2x extraSunlight 1711 R 200W Bed: 22x pureSunlight 1933 R 200W	3230076314 3230076173 3230076314 3230076173 3230076315
Facial tanner	6x SunSphere Pro Facials (UV-A) 3x SunSphere Pro Facials (UV-B)	9114600002 9114600010
Shoulder tanner	1x SunSphere Shoulders K - LEFT 1x SunSphere Shoulders K - RIGHT	9114600012 9114600011
Nominal power	With air conditioning: 12300W / Without air conditioning: 11040W	


<b>K9S hybridSun - Ultra Power - CPI</b>		<b>Item no</b>
Tubes	Canopy: 14x pureSunlight 1723 R 200W 6x smartSunlight 1714 R 200W Side: 6x pureSunlight 1723 R 200W 4x smartSunlight 1714 R 200W Bed: 12x pureSunlight 1933 R 200W 10x smartSunlight 1914 R 200W	3230076314 3230076177 3230076314 3230076177 3230076315 3230076172
Facial tanner	6x SunSphere Pro Facials (UV-A) 3x SunSphere Pro Facials (UV-B)	9114600002 9114600010
Shoulder tanner	1x SunSphere Shoulders K - LEFT 1x SunSphere Shoulders K - RIGHT	9114600012 9114600011
Nominal power	With air conditioning: 12300W / Without air conditioning: 11040W	

## 12.1 Dimensions and distances

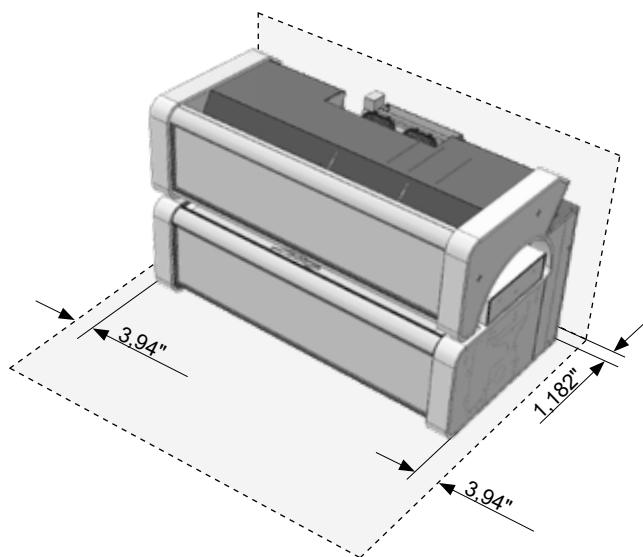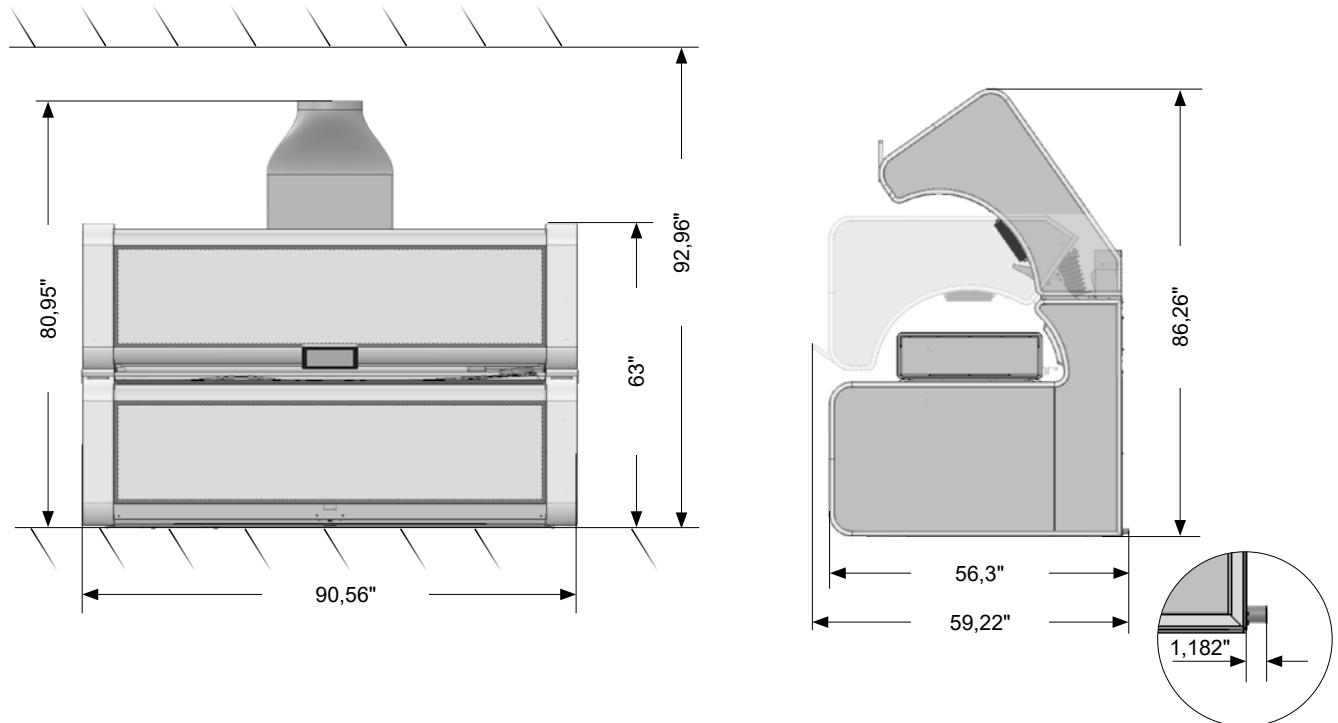


## 12.2 Tube arrangements

### K9S EXTRASUN

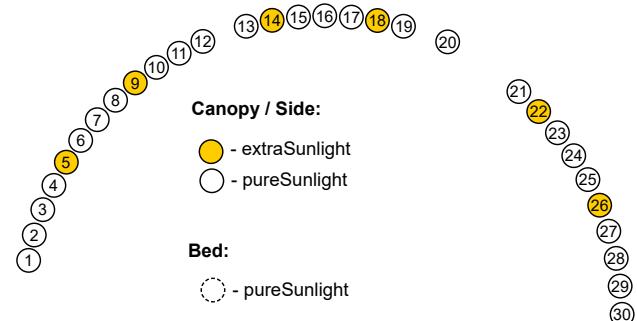

52:51:50:49:48:47:46:45:44:43:42:41:40:39:38:37:36:35:34:33:32:31

### K9S HYBRIDSUN

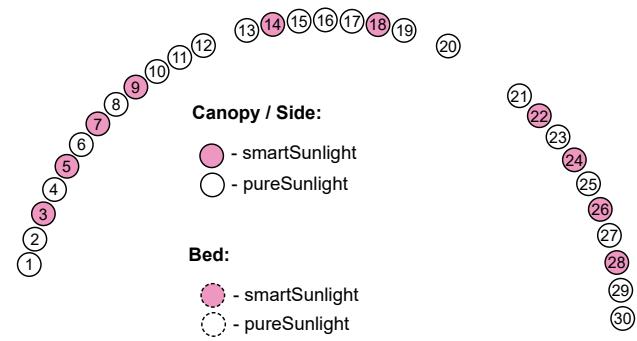

52:51:50:49:48:47:46:45:44:43:42:41:40:39:38:37:36:35:34:33:32:31

## 13. IMPLIED WARRANTY



- 1. WARRANTY** - Laundries unlimited of Indiana, Inc., dba Tanning Supplies unlimited (the "Company") warrants that electrical components are free from defects in its materials and workmanship, under normal use, for one year ("Warranty Period") beginning from the purchase invoice date of the KBL indoor tanning device ("Product") is purchased from the Company or an authorized Distributor of the Company or from an authorized Dealer or Representative of such Distributor or Dealer (collectively the "Distributor"), if you, the original purchaser ("Purchaser"), retain ownership during the Warranty Period. This Warranty is nontransferable. THE WARRANTY CONTAINED IN THIS SECTION 1 IS SUBJECT TO VOIDANCE IN ACCORDANCE WITH SECTION 3.
- 2. WARRANTY FOR ITEMS NOT COVERED BY THE ONE YEAR WARRANTY SET FORTH IN SECTION 1; Acrylics, lamps, lamp starters, filter glass plates, metal structure, plastic covers and air filters** are not covered under this warranty. THE WARRANTY CONTAINED IN THIS SECTION 2 IS SUBJECT TO VOIDANCE IN ACCORDANCE WITH SECTION 3.
- 3. VOIDANCE OF THE WARRANTY.** THE WARRANTIES SET FORTH IN SECTIONS 1 AND 2 HEREIN ABOVE ARE VOID IF YOU: TRANSFER THE PRODUCT TO A THIRD PARTY, MODIFY THE PRODUCT, MISUSE THE PRODUCT, SUBJECT THE PRODUCT TO ABNORMAL CONDITIONS OF OPERATION, ATTEMPT UNAUTHORIZED REPAIRS TO THE PRODUCT, DO NOT USE ORIGINAL EQUIPMENT MANUFACTURER (OEM) REPLACEMENT PARTS, DO NOT FOLLOW THE CARE AND USE INSTRUCTION MANUAL CONCERNING SPACE, ELECTRICAL AND ENVIRONMENTAL REQUIREMENTS, SUBJECT THE PRODUCT TO ACCIDENT, MISUSE OR MISAPPLICATION; OR SERVICE THE PRODUCT BY ANYONE OTHER THAN THE COMPANY OR AN AUTHORIZED SERVICE REPRESENTATIVE OF THE COMPANY OR DISTRIBUTOR
- 4. WARRANTY RETURNS.** All warranty claims can be handled through the Company or Distributor. If you do not know the phone number of the Distributor, you can contact the Company at 1-877.307.8434 (toll free) or 317.217.1700 Monday through Friday from 9:00 AM to 5:00 PM EST. Warranty covered items are to be returned on a part for part replacement. All freight charges are the sole responsibility of the Purchaser.
- 5. DISTRIBUTOR WARRANTIES.** To the extent representations, warranties or commitments are extended to the Purchaser by a Distributor, such representations, warranties and commitments will be those of the Distributor alone, and will not be attributed to the Company and the Company shall not be responsible for same.
- 6. DISCLAIMER OF WARRANTIES.** EXCEPT AS EXPRESSLY STATED IN SECTION 1 AND 2 HEREIN ABOVE, THERE ARE NO OTHER WARRANTIES BY THE COMPANY OR DISTRIBUTOR, EXPRESSED OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE. THE COMPANY AND DISTRIBUTOR DISCLAIM ALL IMPLIED AND EXPRESSED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.
- 7. LIMITATION OF LIABILITY.** THE COMPANY OR DISTRIBUTOR SHALL NOT BE LIABLE, WHETHER IN CONTRACT OR TORT, FOR ANY LOSS OR DAMAGE, INCLUDING BUT NOT LIMITED TO SPECIAL, INDIRECT, CONSEQUENTIAL, PROPERTY, ECONOMIC OR PERSONAL DAMAGES OF THE END USER, OR THIRD PARTIES, EVEN IF ADVISED OF THE POSSIBILITIES OF SUCH DAMAGES, ABOVE OR BEYOND THE REPAIR, REPLACEMENT OR REFUND OF ANY DEFECTIVE PRODUCT, WHICH SHALL BE THE PURCHASER'S SOLE REMEDY. THE PURCHASE PRICE OF THE PRODUCT IS A CONSIDERATION IN LIMITING THE COMPANY'S AND DISTRIBUTOR'S LIABILITY.
- 8. LOCAL LAWS.** Laws pertaining to the rights and limitations of the Warranty vary from state to state. The limitations set forth herein may not be applicable to the Purchaser, or Purchaser may have other legal rights not referenced herein.
- 9. MISCELLANEOUS**
  - 9.1 GOVERNING LAW.** This Warranty shall be governed by, interpreted by and enforced in accordance with the substantive and procedural laws of the State of New Jersey, and the United States of America, conflict of laws notwithstanding. This Warranty and any such claims, disputes or actions is domiciled. The Company, Distributor and Purchaser hereby agree to submit to the subject matter and personal jurisdiction and venue of said courts to resolve any disputes. If any term or provision of this Warranty is adjudicated to be invalid by any Court have jurisdiction, such provision shall be inoperable and deemed omitted and shall not invalidate the remaining provisions hereof.
  - 9.2 ENTIRE AGREEMENT.** This Warranty constitutes the entire agreement of the Purchaser, the Distributor and the Company as to the subject matter and there are no other understandings, agreements or terms, whether oral or written, between the Company and the Purchaser.
  - 9.3 READ AND UNDERSTAND THIS WARRANTY.** Before signing and returning this warranty, the Purchaser acknowledges that Purchaser has read and understands the terms herein, or has had the opportunity to have them read and explained to the Purchaser by an authorized representative.
- 10. VALIDATION.** To validate that you are the original purchaser of the Product from the Company or a Distributor and to ensure that you receive the above-recited benefits under the Warranty, please provide the information on the warranty card, sign the card and mail it within (30) days of purchase to:  
Warranty Department  
Laundries unlimited of Indiana, Inc.  
dba Tanning Supplies unlimited.  
1504 Sadlier Circle South Drive;  
Indianapolis; IN 46239, U.S.A.
- 11. SPARE AND REPLACEMENT PARTS.** Original Equipment Manufacturer's (OEM) lamps and replacement parts are available by direct order. To order, call 1-877.307.8434 (toll free) or 317.217.1700. Please have Credit Card information available when calling or write to:  
Laundries unlimited of Indiana, Inc.  
dba Tanning Supplies unlimited.  
1504 Sadlier Circle South Drive;  
Indianapolis; IN 46239, U.S.A.

## 14. WARRANTY CARD

**KBL****K9S**


warranty card	Company Name/Contact:		
Delivery Address	Street: _____ City, State: _____ Zip Code: _____ Phone: _____		
Model	K9S / CPI		
	<input type="radio"/> extraSun	<input type="radio"/> hybridSun	
Serial #			
Aqua Cool	<input type="radio"/> Yes	<input type="radio"/> No	
Aroma	<input type="radio"/> Yes	<input type="radio"/> No	
airCon Preparation	<input type="radio"/> Yes	<input type="radio"/> No	
Exhaust air system	<input type="radio"/> Air outlet duct <input type="radio"/> Air outlet duct hose (300mm, white, length 3m, 2 hose clamps)		
Mains voltage	<input type="radio"/> 3-phase		
Date of Install			
Installer Name and Address			
Voltages	L1/L2 _____	L2/L3 _____	L3/L1 _____
Remarks			

Office Use Only: Date Received: \_\_\_\_\_ Received by: \_\_\_\_\_



# Remarks



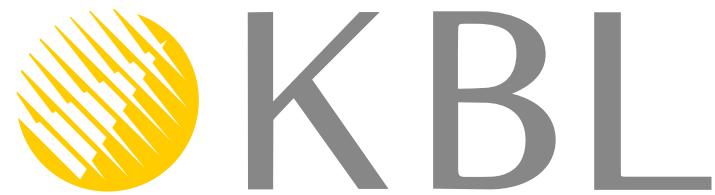

The Beauty & Health Company



Ringstraße 24-26  
56307 Dernbach / Germany  
fon: +49 (0) 26 89.94 26-0  
fax: +49 (0) 26 89.94 26-66