ONYX

ONYX 32 230V



ONYX32Features

Standard


- XL Light
- Digital Display
- 4-Speed Body Fan
- Easy-Access Timer
- Easy Acrylic Removal System
- Turbo Cooling System
- Programmable Internal Timer
- Dual Hour Counters
- TMAX Compatible
- Deco Shield
- Front Skirt

Optional

- Pre-Installed Speakers
- MyMp3
- TMAX Integrated





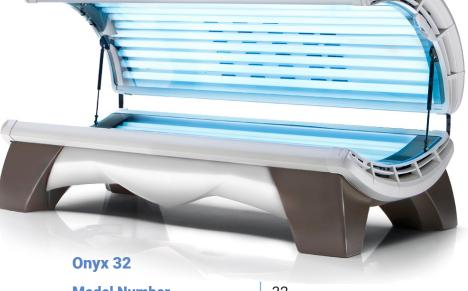

Model Number Canopy Lamps Bench Lamps Facial Tanning Electrical Rating

Power Requirements Buckbooster AC Requirements Session Time Dimensions Recommended Room Size Shipping Weight

32

18 x 110W R-UVA 14 x 100W R-UVA

N/A

230V ~17A 60Hz

2 Pole (2 Hots 1 Ground)

25 Amp

0.50 Kva

BTU 6000


20 Minutes

83"L x 35"W x 47"H

8 ft. x 7 ft.

400 lbs.

Dimensions

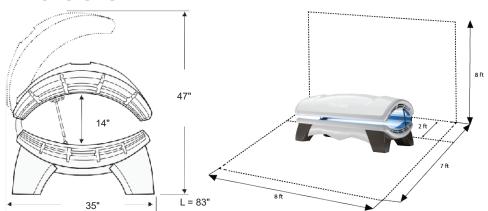



REQUIRED: A 230V - 20 Amp outlet is needed when operating this tanning equipment.



DISCLAIMER: A 110V outlet is needed when operating equipment with external T-max system or MP3 System.

Note: Equipment comes standard in three phase configuration. Buck boosters must be installed by licensed electrician in your state/county



800.874.2776 · Sales@prosun.com · ProSun.com · 2442 23rd St. N. St. Petersburg, FL 33713 510(K): K181455 *ProSun reserves the right to change design and specifications without notice.