ONYX

ONYX 32 SLi Intensive 230V



ONYX32Features

Standard

- XL Light
- Digital Display
- 4-Speed Body Fan
- Easy-Access Timer
- Easy Acrylic Removal System
- Turbo Cooling System
- Programmable Internal Timer
- Dual Hour Counters
- TMAX Compatible
- Deco Shield
- Front Skirt

Optional

- Pre-Installed Speakers
- CqMvM O
- TMAX Integrated









Model Number Canopy Lamps

Bench Lamps
Facial Tanning
Electrical Rating

Power Requirements
Buckbooster
AC Requirements
Session Time
Dimensions
Recommended Room Size
Shipping Weight

32/1-P

12 x 160W R-UVA

5 x 140W R-UVA

14 x 100W R-UVA

1 x 400W

230V ~19A 60Hz

2 Pole (2 Hots 1 Ground)

25 Amp

0.75 Kva

BTU 6000


12 Minutes

83"L x 35"W x 47"H

8 ft. x 7 ft.

450 lbs.



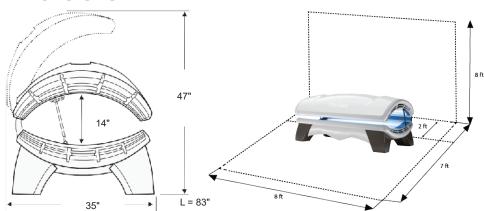



REQUIRED: A 230V - 20 Amp outlet is needed when operating this tanning equipment.



DISCLAIMER: A 110V outlet is needed when operating equipment with external T-max system or MP3 System.

Note: Equipment comes standard in three phase configuration. Buck boosters must be installed by licensed electrician in your state/county



800.874.2776 • Sales@prosun.com • ProSun.com • 2442 23rd St. N. St. Petersburg, FL 33713 510(K): K181455 *ProSun reserves the right to change design and specifications without notice.