

TANNING TIME 10 MINUTES



 KBL

K11
a i r

K11 Air

Power consumption: 6,5 kW / 6,95 kW (with air conditioning)

Weight: approx. 1643 lbs (with air conditioning)

Bed pane: max. load capacity: 330 lbs

ELECTRICAL INFORMATION

Protective class: IP20

Mains voltage: 3-phase operation: 220 V / 3~ / 60 Hz | 2-phase operation: 220 V / 2~ / 60 Hz

Wire cross section: 3-phase operation: 4 x AWG10 | 2-phase operation: 3 x AWG8

Circuit breakers: 3-phase operation: 3 x 25 A | 2-phase operation: 2 x 35 A


MEASUREMENTS

in inches (LENGTH x WIDTH x HEIGHT)

90.6" x 55.6" x 76.4" (open)

90.6" x 57.2" x 62.2" (closed)

Wall clearance: 2"

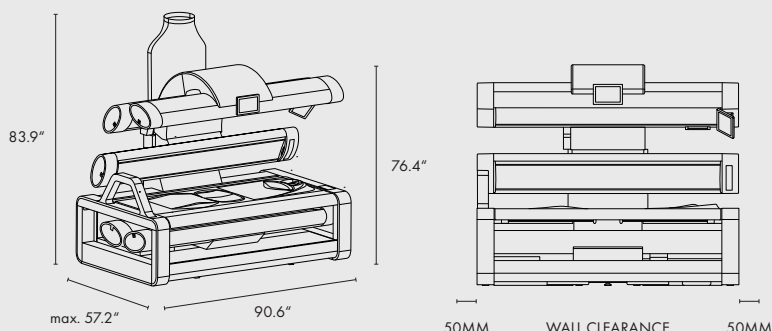

EQUIPMENT*



Errors and omissions possible. KBL reserves the right to change technical data or specifications without notice · www.kbl-usa.com

Contraindication: This product is contraindicated for use on persons under the age of 18 years. "Contraindication: This product must not be used if skin lesions or open wounds are present." "Warning: This product should not be used on individuals who have had skin cancer or have a family history of skin cancer."

"Warning: Persons repeatedly exposed to UV radiation should be regularly evaluated for skin cancer."

* Fully equipped